



ALTAIR

Altair® FluxMotor® 2025

Reluctance Synchronous Machines – Inner rotor

Motor Factory – Export

General user information

Contents

1	Motor factory – Export AREA – Home page view	5
1.1	“DOCUMENT”,	5
1.2	“ADVANCED TOOLS “,	5
2	Make a report	6
2.1	Overview	6
2.2	Area to build the report	6
2.3	Steps to build and export a report	7
2.4	Section selection	7
2.4.1	List of sections available to build the report	7
2.4.2	Selection of sections	8
2.5	Export information	9
3	Export a script	10
3.1	Overview	10
3.2	Area to build the script export	10
4	Build and export a connector for HyperStudy®	11
4.1	Overview	11
4.2	Area to build a connector	11
4.3	Steps to build and export a connector	12
4.4	Test selection	12
4.5	Test configuration	13
4.6	Parameters for HyperStudy®	14
4.6.1	Selection of design parameters	14
4.6.2	Selection of test data	15
4.7	Export information	16
4.8	Get back HyperStudy® results in FluxMotor®	18
4.9	Connection between FluxMotor® and HyperStudy®	19
	Warning: Mandatory synchronization between connector and FluxMotor versions	19
5	Build and export a model in Flux® 2D environment	21
5.1	Overview	21
5.2	Area to build and to export a model to Flux® 2D environment	21
5.3	Steps to build and export a model to Flux® 2D environment	22
5.4	Test selection	23
5.5	Test configuration	23
5.6	Export information	24
5.7	Available models to be exported and user inputs.	25

5.7.1	Overview	25
5.7.2	Without scenario – Current source – Motor and generator – Basic model	25
5.7.2.1	Positioning and objective	25
5.7.2.2	Settings	25
5.7.2.3	Standard inputs	26
5.7.2.4	Advanced inputs	26
5.7.3	Working point – Sine wave – Motor – I, Ψ , N	27
5.7.3.1	Positioning and objective	27
5.7.3.2	Settings	27
5.7.3.3	Standard inputs	28
5.7.3.4	Advanced inputs	28
5.7.4	Working point – Sine wave – Motor – I, Ψ , N - Hairpin	29
5.7.4.1	Positioning and objective	29
5.7.5	List of generic advanced inputs	29
6	Build and export a model in Flux® SKEW environment	30
6.1	Overview	30
6.2	Area to build and to export a model to Flux® SKEW environment.	30
6.3	Particularities in building and to exporting a model to Flux® SKEW environment.	31
7	Build and export a model in Altair® Flux® 3D ENVIRONMENT.	32
7.1	Overview	32
7.2	Area to build and to export a model to Flux® 3D environment.	32
7.3	Particularities in building and exporting a model to Flux® 3D environment.	33
8	Build and export a model in Altair FLOW SIMULATOR environment	34
8.1	Overview	34
8.2	Area to build and to export a model to Flow Simulator environment	34
8.3	Steps to build an export Flow Simulator	35
8.3.1	Introduction	35
8.3.2	Test selection	35
8.3.3	Test configuration	35
8.3.4	Export information	35
8.4	Available models to be exported and user inputs	37
8.4.1	Overview	37
8.4.2	Characterization – Thermal -Motor & Generator – Steady State	37
8.4.2.1	Positioning and objective	37
8.4.2.2	Settings	37
8.4.2.3	Standard inputs	37
8.4.2.4	Advanced inputs	37
8.4.3	Characterization – Thermal - Motor & Generator – Transient	37
8.4.3.1	Positioning and objective	37
8.4.3.2	Settings	37
8.4.3.3	Standard inputs	38
8.4.3.4	Advanced inputs	38
9	Export to SYSTEM	39
9.1	Overview	39
9.2	Area to export LUT	39

9.3	Steps to build an export LUT	40
9.3.1	Introduction	40
9.3.2	Test selection	40
9.3.3	Test configuration	40
9.3.4	Export information	41
9.4	FMU format files	42
9.4.1	Compatibility	42
9.4.2	A C/C++ compiler is needed	43
9.4.2.1	C/C++ compiler / System requirements	43
9.4.2.2	Access path of the C/C++ Compiler	43
9.4.3	Import FMU data in Altair® Activate®	44
9.5	MAT format files	46
9.5.1	Introduction	46

1 MOTOR FACTORY – EXPORT AREA – HOME PAGE VIEW

The area “EXPORT” of Motor Factory groups two main families of functions:

1.1 “DOCUMENT”,


In “DOCUMENT” the function “REPORT” allows building reports automatically to describe all the work achieved for the design as well as for the tests.

Then, the function “SCRIPT” allows to build and export a python script of a current motor in the application Script Factory or in a targeted folder.

1.2 “ADVANCED TOOLS “,

In “ADVANCED TOOLS” the function “HYPERSTUDY” allows to build and export a connector in Altair® HyperStudy® for performing studies like optimization or Design of Experiment (DOE).

Then, the functions “FLUX2D”, Flux Skew, Flux 3D allow to build and export a model in Altair® Flux® environment (2D, Skew or 3D) for performing advanced studies either with magneto static or transient applications

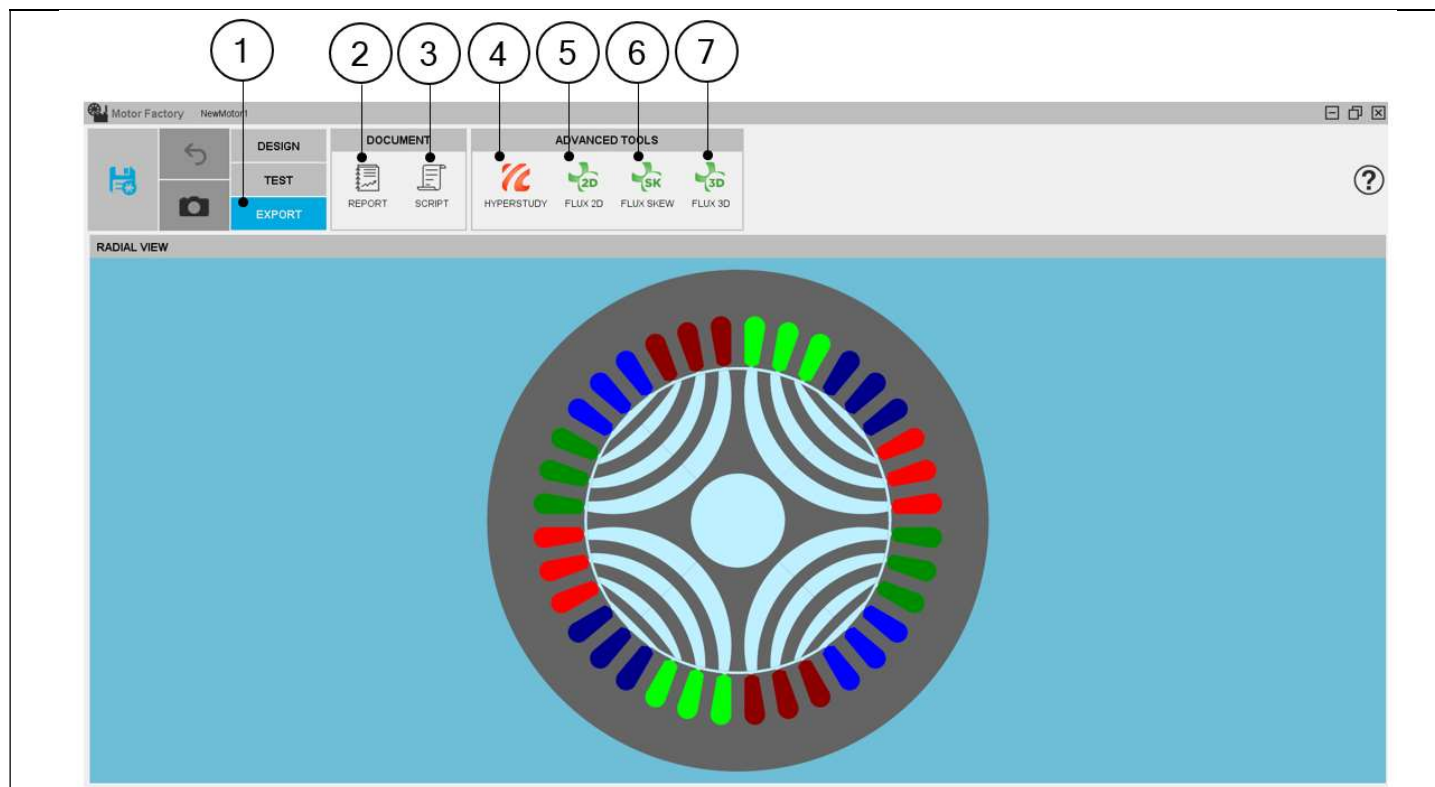

Motor Factory - EXPORT area

1	Selection of the EXPORT area of Motor Factory.
2	Access the area “REPORT” in which a report can be made
3	Access the area “SCRIPT” for generating a python file in which all the needed command lines are written to rebuild the motor
4	Access the area “HYPERSTUDY “ in which a connector can be made and sent to HyperStudy®
5	Access the area “FLUX2D” in which a model can be made and sent to Flux® 2D
6	Access the area “FLUX SKEW” in which a model can be made and sent to Flux® Skew
7	Access the area “FLUX3D” in which a model can be made and sent to Altair® Flux® 3D


2 MAKE A REPORT

2.1 Overview

The aim of this export is to build and quickly export a report showing all the work achieved to design and test the machine.

As a result, the report can be exported in a pdf or html file format. It can also be attached to the motor in the "Motor Catalog" or simply displayed in the report area.

2.2 Area to build the report

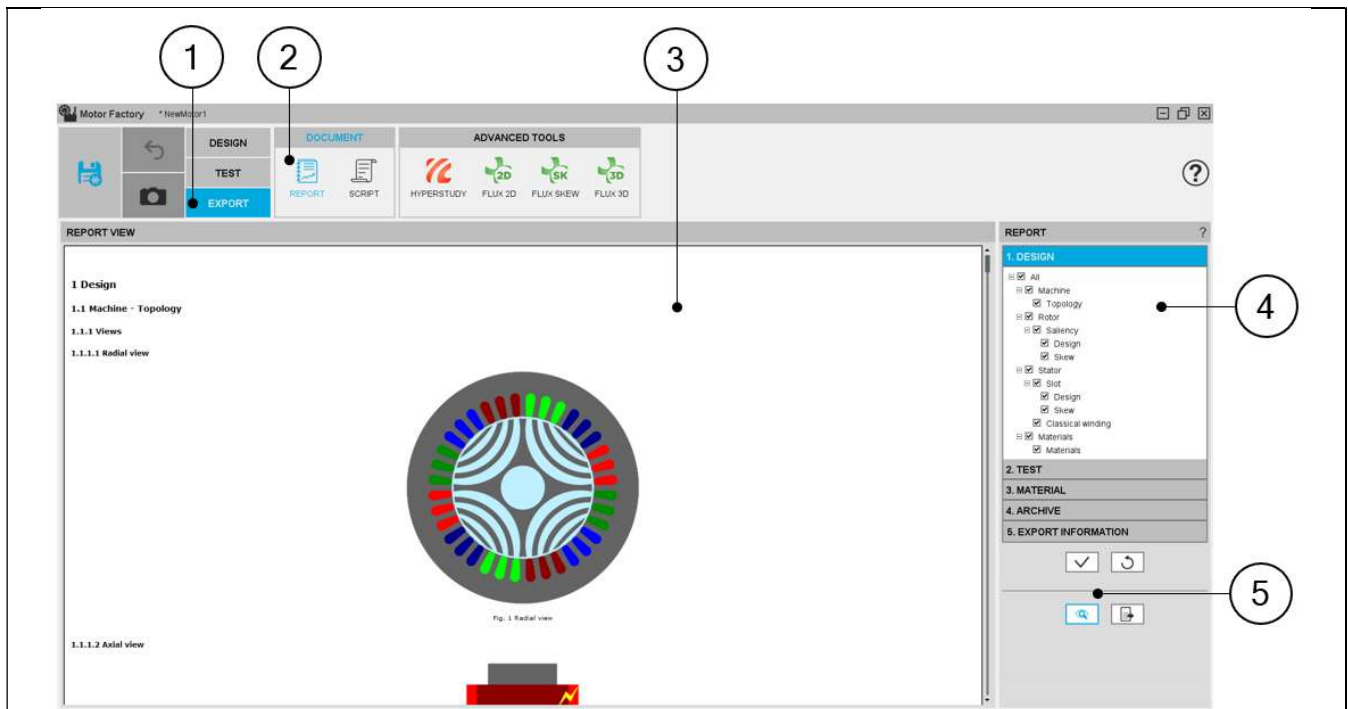

Motor Factory – EXPORT AREA – Export a report

1	Selection of the EXPORT area of Motor Factory.
2	Access the area in which a report can be made
3	Zone to visualize the report (= preview)
4	4 steps to build the report which user need
5	Buttons to validate inputs, display a preview and export a report

2.3 Steps to build and export a report

Five steps are needed to build and export a report: In EXPORT / DOCUMENT / REPORT area:

- 1) Select the sections to write dealing with the design
- 2) Select the sections to write dealing with the tests
- 3) Select the sections to write dealing with the materials
- 4) Select the “saved test results” you want to add as archive in the report
- 5) Define the export information

2.4 Section selection

2.4.1 List of sections available to build the report

Motor Factory - EXPORT AREA – Export a report – Chapters to be selected

1	Chapters to describe the DESIGN. Machine, Rotor and Stator characteristics.
2	Chapters to describe the TEST results. All the test results are available as soon as the corresponding computations are performed.
3	List of materials used to build the machine can be added to the report with all their physical properties.
4	Archive groups all the tests which have been saved during the process. These can be added to the report. Note: A maximum of five results per test can be added to the report.
5	Button to apply the selection of the user input selections (selection of chapters)
6	Button to restore default values.

2.4.2 Selection of sections

Motor Factory

DESIGN

TEST

EXPORT

DOCUMENT

REPORT

SCRIPT

ADVANCED TOOLS

HYPERSTUDY

FLUX 2D

FLUX 3D

FLUX 3D

FLUX 3D

REPORT VIEW

2.2 Working point - Sine wave - Motor - Current-Control angle-Speed

2.2.1 Configuration

2.2.1.1 Inputs

Name	Value	Name	Value	Name	Value
Context		Package	Sine wave	Convention	Motor
Family	Working point				
Test	Current-Control angle-Speed				
Standard parameters					
Current definition mode	Density	Line current, rms (A)	72.38	Current density, rms (A/mm2)	6.3
Control angle (deg)	+45.0	Speed (rpm)	1 500.0	Ripple torque analysis	No
Additional losses (%)	0.0				
Advanced parameters					
No. comp. / ripple period		Motor initial position (deg)	60.0		
Mesh order	2nd	Airgap mesh coefficient	1.5		

2.2.1.2 Settings

Name	Value	Name	Value	Name	Value
Thermal					
Thermal solving	None				
Winding straight part temperature (°C)	20.0	C.S. and winding temperature (°C)	20.0	O.C.S. and winding temperature (°C)	20.0
Electronics					
Power electronics stage	Without				
Mechanics					
Mechanical loss computation mode	User				
Reference speed (rpm)	1 500.0	Losses at reference speed (W)	0.0	Speed exponent	0.5

2.2.1.3 Winding characteristics

Name	Value	Name	Value	Name	Value
Winding					
Winding connection	Wye	Winding resistance factor	1.0		
Winding temperature (°C)	20.0				

REPORT

1. DESIGN

2. TEST

3. MATERIAL

4. ARCHIVE

5. EXPORT INFORMATION

✓

↺

🔍

📄

Motor Factory - EXPORT AREA – Export a report – Chapters to be selected

1

Section names are shortcuts for displaying the corresponding section of the report

2

Check the section to add chapters to the report

3

Button "Preview" considers the selected chapters and displays the report

2.5 Export information

REPORT ?

1. DESIGN

2. TEST

3. MATERIAL

4. ARCHIVE

5. EXPORT INFORMATION

EXPORT PARAMETERS

Report name Report

Export format PDF

Destination folder C:\Users\username

Attached to the motor No

✓ ↺

🔍 📄➡

1

2

3

4

5

6

Motor Factory - EXPORT AREA – Export a report – Export information

1	Access to the area in which export parameters can be defined
2	A file name must be written (Default name = "Report")
3	The file format must be chosen (pdf or html) to build the report
4	A folder in which storing the report must be selected via the browser
5	It is possible to attach the report (HTML or PDF file) to the motor in the "Motor Catalog"
6	Button to export the report by considering all the previous defined parameters


3 EXPORT A SCRIPT

3.1 Overview

Next to the function “Report”, the function “Script” gives the capability to build and export a python script file, in which all the needed command lines are written to rebuild the considered motor. The script is generated with all the needed sections and sub-sections in Motor Factory, dedicated to the design, the test, and the exports.

Then Script Factory can be used to automate some study such like running serial tests or serial design configurations.

3.2 Area to build the script export

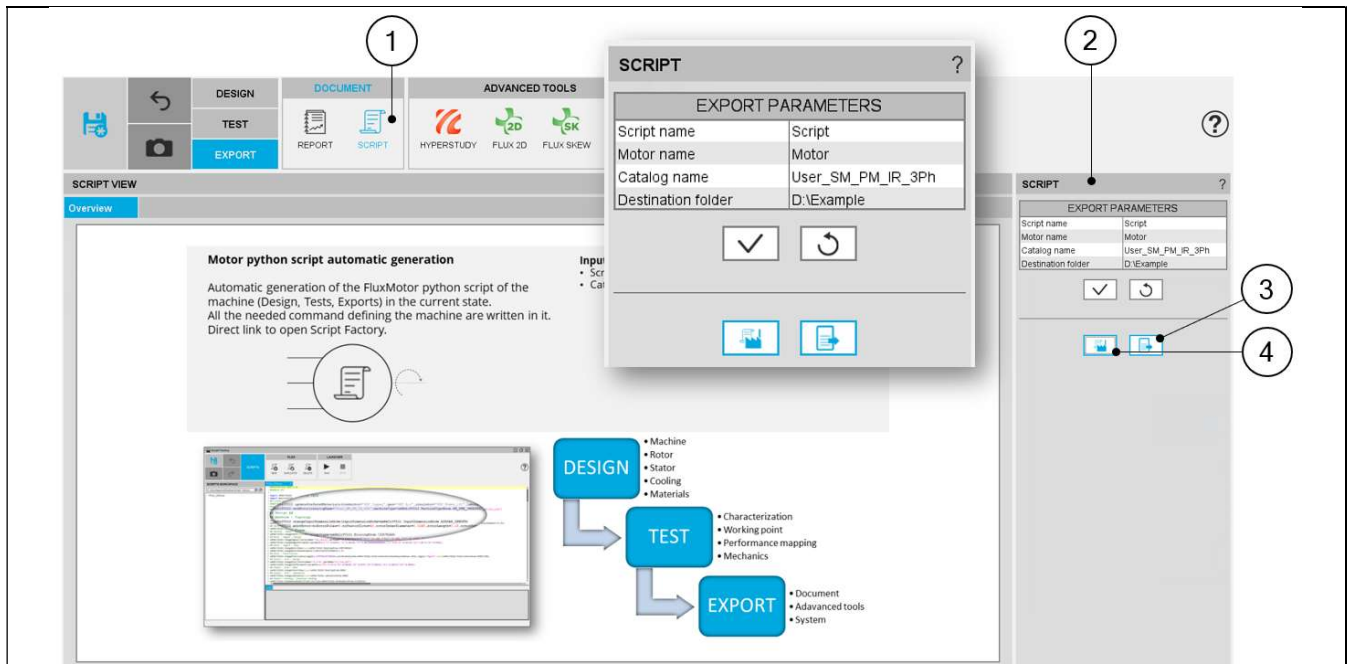

Motor Factory – EXPORT AREA – Export a python script

1	In Motor Factory select EXPORT / SCRIPT environment.
2	The EXPORT / SCRIPT environment user inputs allow to define the name and the location of the new script file + the name of the motor to be rebuilt from the new python script file, with the catalog name in which it will be stored. Note: Without defining other names for the motor and/or the catalog, the original motor would be overwritten while running the new python script file.
3	Button to build and to export the resulting python file.
4	Button to build and export the resulting python file, and then to open it directly in the Script Factory.

4 BUILD AND EXPORT A CONNECTOR FOR HYPERSTUDY®


4.1 Overview

The aim of this export is to build a connector, allowing Altair® HyperStudy® to drive Altair® FluxMotor® for performing motor optimizations based on the computation processes embedded into FluxMotor®.

This can be done for an eligible test list by using input/output parameters defined in FluxMotor®.

Then, after having performing studies with HyperStudy® (Optimization or Design Of Experiment -DOE- for instance), the results can be visualized by selecting the resulting machine in the “Motor Catalog”.

4.2 Area to build a connector

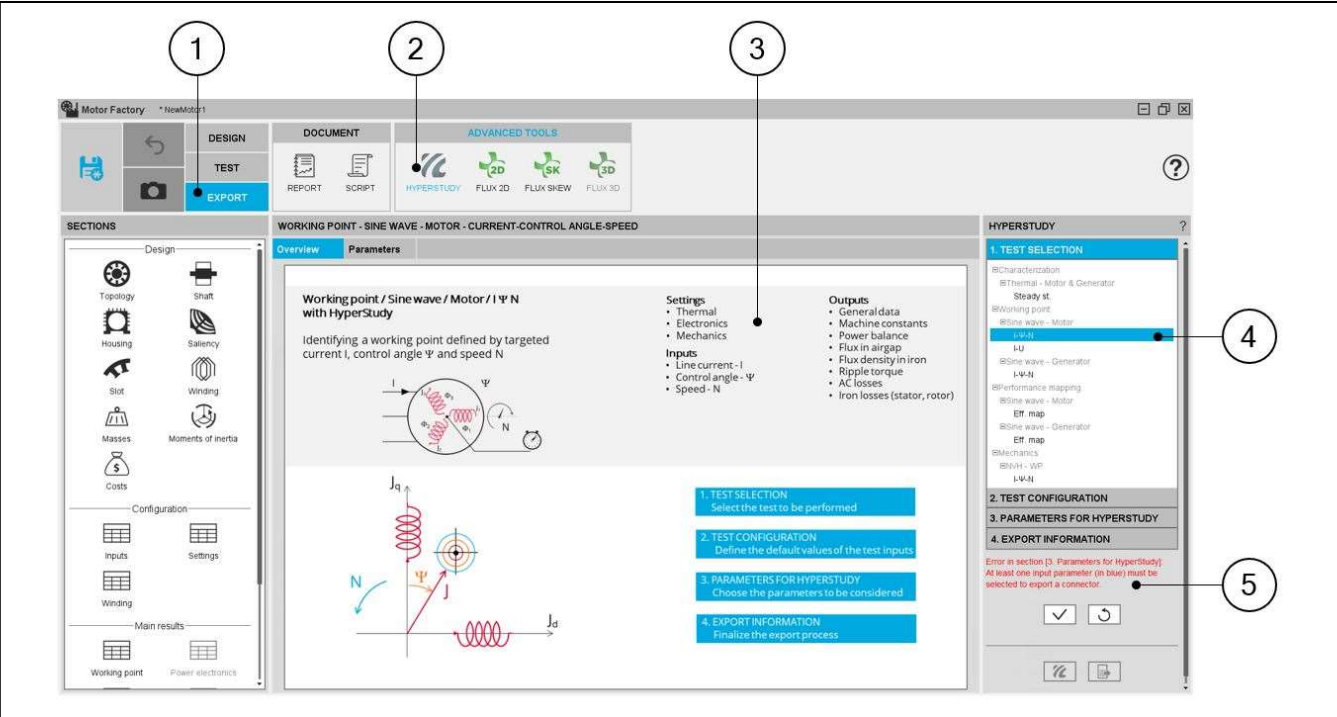

Motor Factory – EXPORT AREA – Export connector for HyperStudy®

1	Selection of the EXPORT area of Motor Factory.
2	Access the area in which a connector for HyperStudy® can be made
3	Zone to visualize either the overview of the selected test or the corresponding user input/output parameters
4	4 steps to build the connector to be exported for HyperStudy®
5	Buttons to validate inputs, display a preview and export the built connector for HyperStudy®

4.3 Steps to build and export a connector

In EXPORT / ADVANCED TOOLS / HYPERSTUDY area, 4 steps are needed to build and export a report:

- 1)

Select the test which will be performed by HyperStudy®
- 2)

Define the test configuration, that means the user inputs/outputs parameters needed to define the test (settings and user inputs of the considered test)
- 3)

Select the inputs/outputs parameters for performing studies with HyperStudy®
- 4)

Define the export information

4.4 Test selection

In the current version of FluxMotor®, 7 tests can be selected for Reluctance Synchronous Machines:

- Characterization / Thermal / Motor & generator / Steady state
- Working point / Sine wave / Motor / I-Ψ-N
- Working point / Sine wave / Motor / I-U
- Working point / Sine wave / Generator / I-Ψ-N
- Performance mapping / Sine wave / Motor / Efficiency mapping
- Performance mapping / Sine wave / Generator / Efficiency mapping
- Mechanics / NVH / Working point / I-Ψ-N

When a test is selected, the corresponding overview is displayed at the center of the screen, showing the main inputs to be considered.

Motor Factory – EXPORT AREA – Export connector for HyperStudy®

1	Selection of a test to be performed by HyperStudy®
2	Display of general information (overview) dealing with the selected test

4.5 Test configuration


After selecting a test, the corresponding test inputs (settings and user inputs) must be defined. This allows to define the initial conditions for testing.


WORKING POINT - SINE WAVE - MOTOR - CURRENT-CONTROL ANGLE-SPEED

OverviewParameters

Working point / Sine wave / Motor / $I \Psi N$ with HyperStudy

Identifying a working point defined by targeted current I , control angle Ψ and speed N



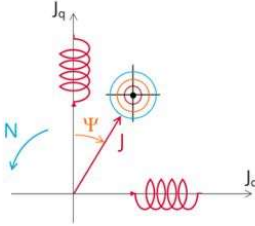

Settings

- Thermal
- Electronics
- Mechanics

Inputs

- Line current - I
- Control angle - Ψ
- Speed - N

Outputs

- General data
- Machine constants
- Power balance
- Flux in airgap
- Flux density in iron
- Ripple torque
- AC losses
- Iron losses (stator, rotor)

1. TEST SELECTION
Select the test to be performed

2. TEST CONFIGURATION
Define the default values of the test inputs

3. PARAMETERS FOR HYPERSTUDY
Choose the parameters to be considered

4. EXPORT INFORMATION
Finalize the export process

HYPERSTUDY

1. TEST SELECTION

2. TEST CONFIGURATION

ThermalElectronicsMechanics

INPUTS

Computation mode	Fast
Current density, rms (A/mm2)	6.3
Control angle (deg)	-45.0
Speed (rpm)	1500.0
AC losses analysis	-
Ripple torque analysis	No
Additional losses (%)	0.0

3. PARAMETERS FOR HYPERSTUDY

4. EXPORT INFORMATION

Error in section [3. Parameters for HyperStudy]:
At least one input parameter (in blue) must be selected to export a connector.

✓↺

🔄📄

Motor Factory – EXPORT AREA – Export connector for HyperStudy®

1	Overview of the selected test is displayed
2	User inputs can be defined in the test area

Note: The user help information about the test parameters is defined in the user help guide of the corresponding test. Please refer to the corresponding section.

4.6 Parameters for HyperStudy®

This section allows to select the parameters which must be available for the optimization in HyperStudy®. These can be design parameters, parameters to define the test conditions (inputs and/or settings) or test results.

4.6.1 Selection of design parameters

Motor Factory – EXPORT AREA – Export connector for HyperStudy®									
Design parameters selection									
1	Tab to be expanded to choose input/output parameters for HyperStudy®								
2	Area in which input/output parameters are stored for HyperStudy®								
3	Shortcuts to select the part of the design to be considered for the selection of parameters								
4	All available design inputs are displayed. The corresponding dimension is highlighted when selected - arrow (5). When a parameter is chosen, the associated box is ticked (4), and the parameter name is stored in the selected parameters area (2).								
5	Arrow illustrating the selected design input parameter								
6	Button to validate the previous choices								

Note: Data which are given by the user are written in blue. They are inputs data. Data resulting from internal computations (outputs) are written in black. This allows the users to quickly differentiate between the input data and output data inside data tables.

4.6.2 Selection of test data

The test data groups test results as well as the user inputs and settings. All these data can be selected for optimization in HyperStudy®.

General data	Motor	Speed (rpm)	Electrical frequency (Hz)
Operating mode	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Mechanical torque (N.m)	<input type="checkbox"/>	Machine electrical power (W)	<input type="checkbox"/>
Mechanical power (W)	<input type="checkbox"/>	Machine total losses (W)	<input type="checkbox"/>
Machine efficiency (%)	<input type="checkbox"/>	Apparent power (VA)	<input type="checkbox"/>
Central angle (deg)	<input type="checkbox"/>	Power factor	<input type="checkbox"/>
Line current, rms (A)	<input type="checkbox"/>	Phase current, rms (A)	<input type="checkbox"/>
Line-Line voltage, rms (V)	<input type="checkbox"/>	Phase voltage, rms (V)	<input type="checkbox"/>
Machine constants	<input type="checkbox"/>		
Current density, rms (A/mm ²)	<input type="checkbox"/>	Electrical loading, rms (A/m)	Power density (W/kg)
k _t (N/A)	<input type="checkbox"/>		
Power balance	<input type="checkbox"/>		
Machine total losses (W)	<input type="checkbox"/>	Stator Joule losses (W)	
Joule losses (W)	<input type="checkbox"/>	Stator iron losses (W)	
Total iron losses (W)	<input type="checkbox"/>	Additional losses (W)	
Mechanical losses (W)	<input type="checkbox"/>		
Flux in airgap	<input type="checkbox"/>		
Flux density, ARV (T)	<input type="checkbox"/>	Flux density 1st harm., rms (T)	Flux density, peak (T)
Flux / pole, ARV (Wb)	<input type="checkbox"/>	Flux / pole 1st harm., rms (Wb)	Flux / pole, peak (Wb)
Flux density in iron	<input type="checkbox"/>		
Stator tooth, max (T)	<input type="checkbox"/>	Stator tooth, mean (T)	
Stator foot tooth, max (T)	<input type="checkbox"/>	Stator foot tooth, mean (T)	
Stator yoke, max (T)	<input type="checkbox"/>	Stator yoke, mean (T)	
Rotor yoke, max (T)	<input type="checkbox"/>	Rotor yoke, mean (T)	
Rotor web, max (T)	<input type="checkbox"/>	Rotor web, mean (T)	
Rotor bridge, max (T)	<input type="checkbox"/>	Rotor bridge, mean (T)	
Inductances			
Working point	<input type="checkbox"/>		
D-axis static inductance Ld (H)	<input type="checkbox"/>	Q-axis static inductance Lq (H)	Saliency

Motor Factory – EXPORT AREA – Export connector for HyperStudy® – Test data selection

1	Tab to be expanded to choose input/output parameters for HyperStudy®
2	Area in which input/output parameters are stored for HyperStudy®
3	Shortcuts to select the part of the test condition and test results to be considered for the selection of parameters
4	All available test data (test results as well as user inputs) are displayed. When a data is chosen, the associated box is ticked (4), and the parameter name is stored in the selected parameters area (2).
5	Display of data which can be selected for HyperStudy® studies
6	Button to validate the previous choices


Note: Data which are given by the user are written in blue. These are inputs data. Data resulting from internal computations (outputs) are written in black. This allows the users to quickly differentiate between the input data and output data inside data tables.

4.7 Export information

The last step for building the connector for HyperStudy® is to define the export information.

There are three data to be defined:

- The name of the connector
- The folder in which the connector must be stored
- The last answer, “Save iteration (Yes/No)” indicates if the results of the HyperStudy® must be stored in a dedicated catalog of Motor Catalog application. When “Yes” is answered all the resulting motors can be visualized in Motor Catalog, and then these can be edited in the Motor Factory very quickly.

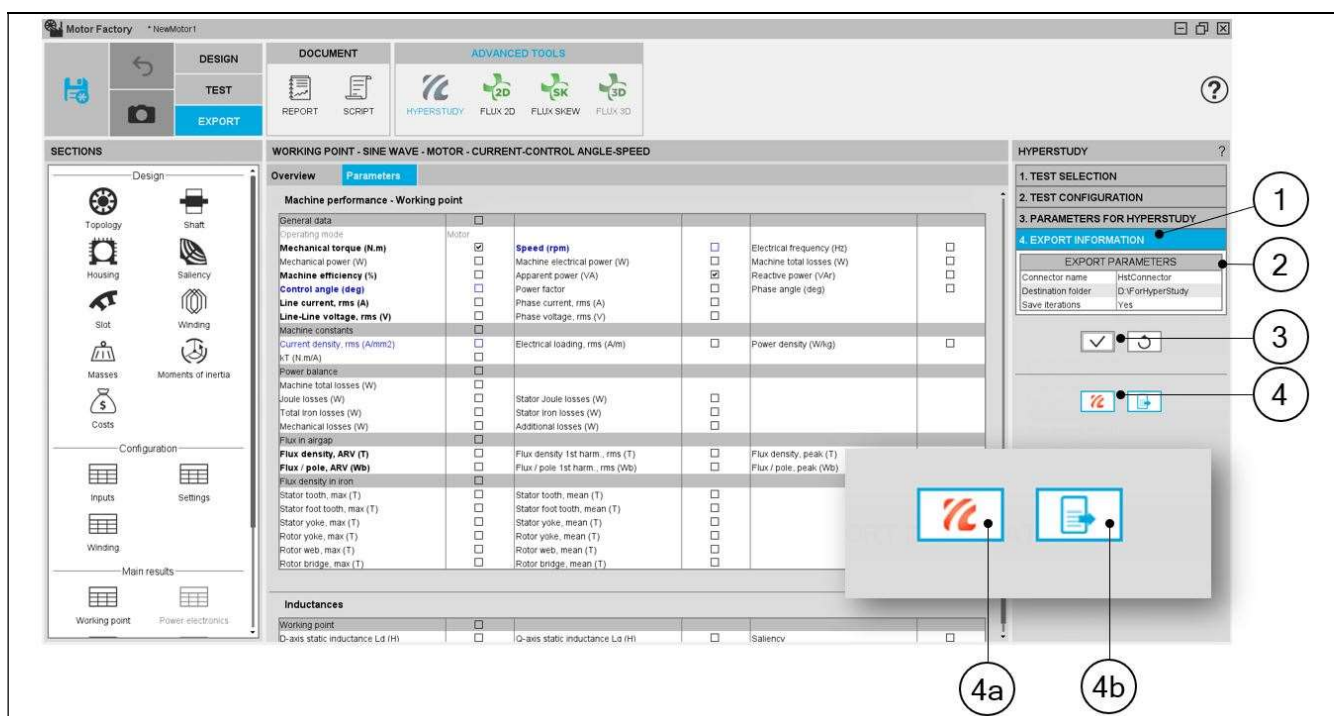

Motor Factory – EXPORT AREA – Export connector for HyperStudy® – Export information

1	Tab to be expanded to define the export information for HyperStudy®
2	Area in which the export parameters to be defined are listed
3	Button to validate the previous choices
4	Buttons to finalize the export.
4a	To finalize this operation from FluxMotor, a first button allows to directly and automatically launches HyperStudy, builds and load the connector to perform the optimization
4b	Button to finalize the export of the connector. When one clicks on this button opened the folder where the connector is stored.

Note: When one clicks on this button (4a), HyperStudy is automatically opened, with the connector built by FluxMotor uploaded. The studies can be initialized and run immediately in HyperStudy. The input variables as well as the Output responses that have been selected in FluxMotor are automatically identified and uploaded.

Note: When data is missing in the third table; “Parameters for HyperStudy®” for instance, an error message is displayed in the red color font which indicates, what is missing and where. If all the needed information is missing, exporting a connector is not allowed.

HYPERSTUDY?

1. TEST SELECTION

2. TEST CONFIGURATION

3. PARAMETERS FOR HYPERSTUDY

4. EXPORT INFORMATION

EXPORT PARAMETERS

Connector name	HstConnector
Destination folder	D:\ForHyperStudy
Save iterations	Yes

Error in section [3. Parameters for HyperStudy]:
At least one input parameter (in blue) must be selected to export a connector.

✓

↺

⚙️

🖨️

1


2

Motor Factory – EXPORT AREA – Export connector for HyperStudy® – Error message

1	Error message written in red font
2	The two buttons to export the connector and run launch HyperStudy are not active if the needed data is missing

4.8 Get back HyperStudy® results in FluxMotor®

All the motors resulting from the operations performed with HyperStudy® can be used back in Motor Catalog of FluxMotor®, and then these can be edited in Motor Factory very quickly.

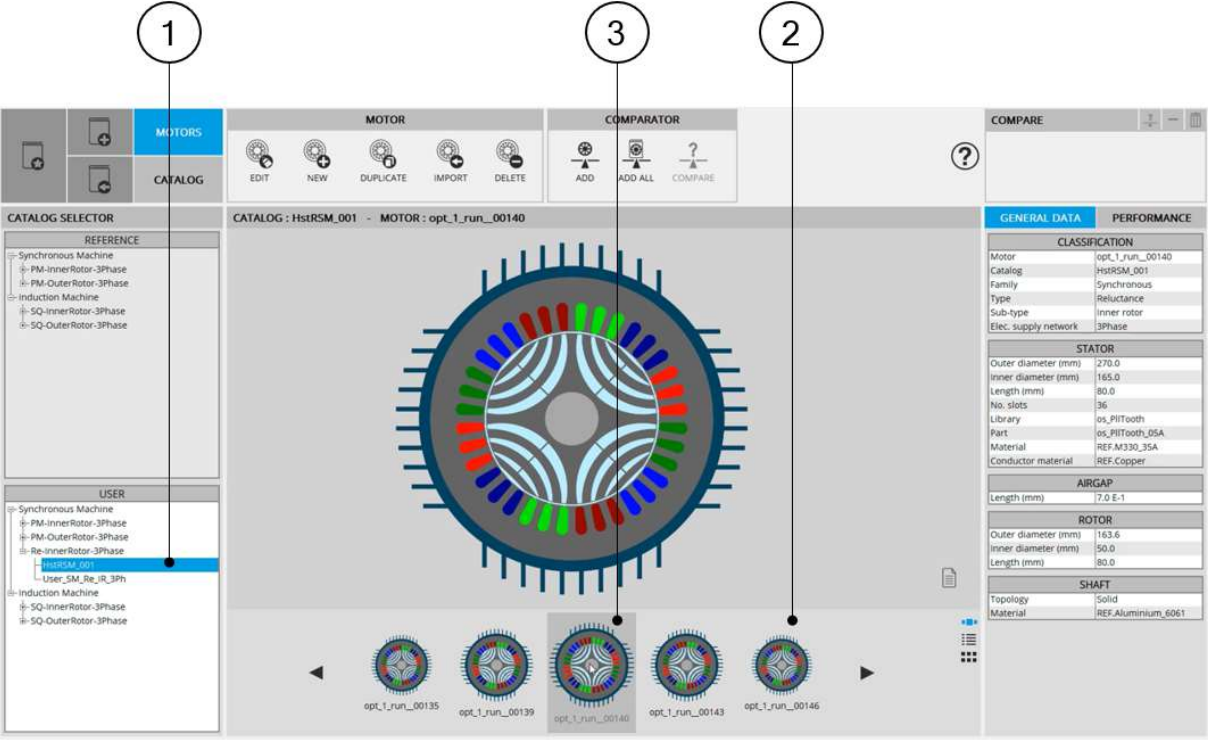

Motor Catalog – Visualization of results got from HyperStudy®

1	A catalog is automatically built by using the name of the connector defined by the user
2	All the operations from HyperStudy® are stored in the dedicated catalog
3	Each motor can be selected, visualized and edited in the Motor Factory, to be evaluated more in depth

4.9 Connection between FluxMotor® and HyperStudy®

Before starting new studies in HyperStudy® by using connectors exported from Altair FluxMotor™, Altair FluxMotor™ must be registered as a new solver script in HyperStudy®.
This must be defined only while using the coupling for the first time.

Label	Varname	Type	Preference	Path
1 RADIOSS	radioss	RADIOSS	HyperWorks	C:/Program Files/Altair/2021/hwdesktop/./hwsolvers/scripts/radioss.bat
2 OptiStruct	os	OptiStruct	HyperWorks	C:/Program Files/Altair/2021/hwdesktop/./hwsolvers/scripts/optistruct.bat
3 MotionSolve	ms	MotionSolve	HyperWorks	C:/Program Files/Altair/2021/hwdesktop/./hwsolvers/scripts/motionsolve.bat
4 Python	py	Python	HyperWorks	C:/Program Files/Altair/2021/hwdesktop/./common/python/python3.5/win64/pyth...
5 Tcl	tcl	Other Application	HyperWorks	C:/Program Files/Altair/2021/hwdesktop/hw/tcl/tcl8.5.9/win64/bin/tclsh85.exe
6 Templex	templex	Other Application	HyperWorks	C:/Program Files/Altair/2021/hwdesktop/hw/bin/win64/templex.exe
7 HM Batch	hmbatch	Other Application	HyperWorks	C:/Program Files/Altair/2021/hwdesktop/hm/bin/win64/hmbatch.exe
8 HM BatchMesher	hmbatchmesher	Other Application	HyperWorks	C:/Program Files/Altair/2021/hwdesktop/hm/batchmesh/hw_batchmesh.bat
9 MDL Batch	mdl_batch	Other Application	HyperWorks	C:/Program Files/Altair/2021/hwdesktop/io/translators/bin/win64/mdl_batch.bat
10 HyperStudy Batch	hstbatch	Other Application	HyperWorks	C:/Program Files/Altair/2021/hwdesktop/hst/bin/win64/hstbatch.exe
11 HyperWorks	hw_exe	Other Application	HyperWorks	C:/Program Files/Altair/2021/hwdesktop/hw/bin/win64/hw.exe
12 HV Trans	hvtrans	Other Application	HyperWorks	C:/Program Files/Altair/2021/hwdesktop/io/result_readers/bin/win64/hvtrans.exe
13 FLUX	flux	Flux	HyperWorks	C:/Program Files/Altair/2021/hwdesktop/./flux/Flux/Bin/prg/win64/flux.exe
14 None	hst_none	None	Internal	C:/Program Files/Altair/2021/hwdesktop/hst/bin/win64/hstsolver_none.bat
15 FluxMotor	fluxmotor	FluxMotor	HyperStudy	C:/Program Files/Altair/2025/flux/FluxMotor/Scripts/win/FluxMotors.exe

C:/Program Files/Altair/2025/flux/FluxMotor/Scripts/win/FluxMotors.exe

Connection between Altair FluxMotor™ and HyperStudy®


1	Open the area in HyperStudy® to register FluxMotor® 2025 script
2	Path where FluxMotors.exe must be selected to be registered as a new solver in HyperStudy®. Note: FluxMotors.exe with a "s" at the end of FluxMotors. This must be defined only while using the coupling for the first time. Note: Since the version 2022.1 of HyperStudy, the FluxMotor solver script is automatically registered, when the default path installation is selected while installing Flux and FluxMotor

Note: The new auto generating the HyperStudy Study in HyperStudy Application (described above) allows to automatically register FluxMotor® as a new solver script in HyperStudy®. If HyperStudy is not install in the same folder (by default: C:\Program Files\Altair\2025\hwdesktop\hst), the path must be defined in the user preferences via the supervisor of FluxMotor (Path to HyperStudy – Needed for HyperStudy export – Ref. 3 below)

Warning: Mandatory synchronization between connector and FluxMotor versions

The connectors used in HyperStudy must be synchronized with the FluxMotor solver version.
An error message (inside the log files) is generated while performing HyperStudy studies with a connector provided with a former version of FluxMotor solver.
A connector provided with FluxMotor version N-1 (or older) cannot be used in HyperStudy where the FluxMotor Solver Version N (or newest) is selected.

Since the FluxMotor 2022.3 version, each time a connector is generated, a ConnectorUpdater.py file is provided and located in the same folder as the connector
Thanks to this script, the user can update an older HyperStudy connector generated with a former version of FluxMotor.
Please refer to the document MotorFactory_Introduction.pdf for additional information in the section dedicated to HyperStudy.

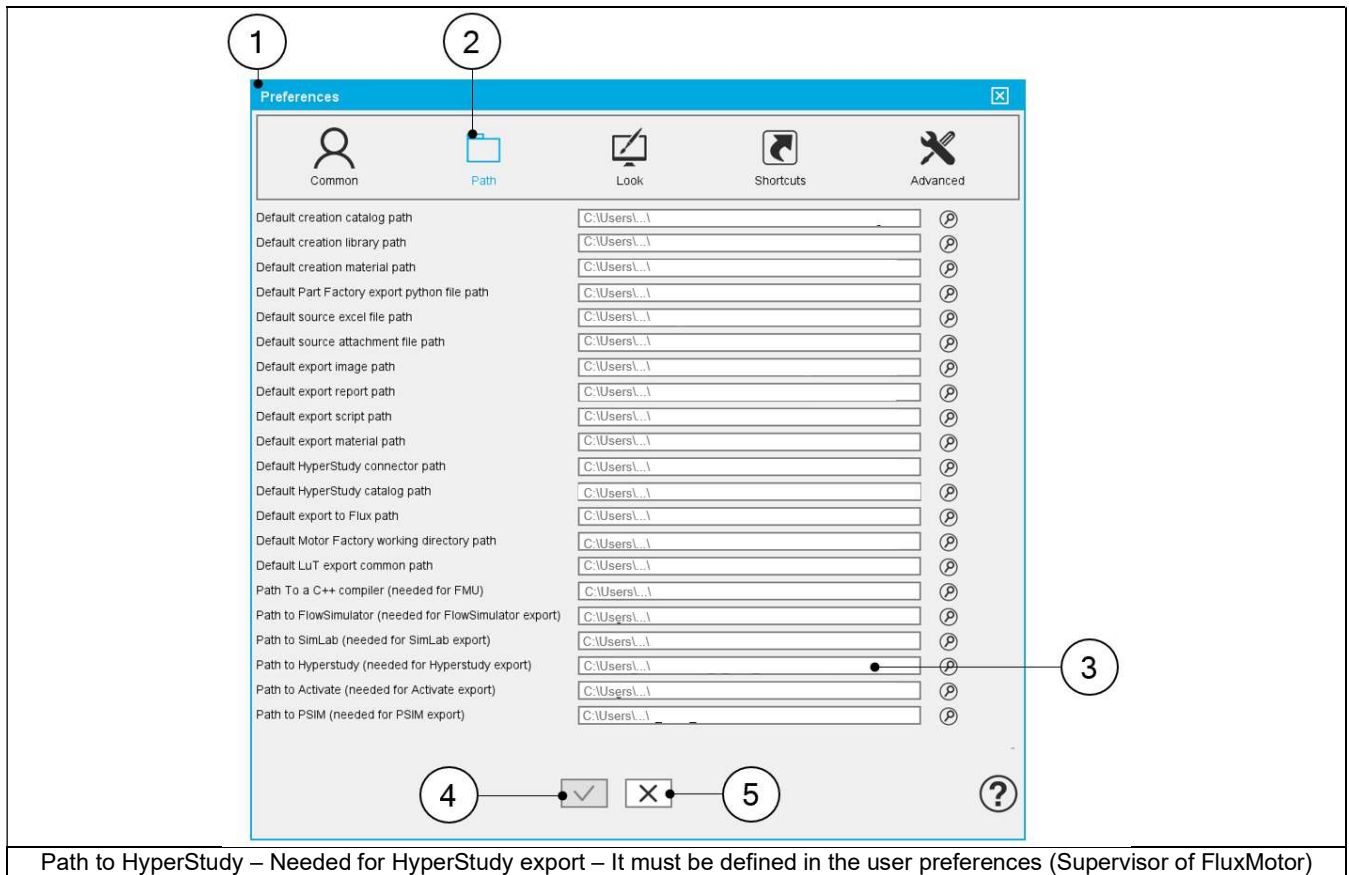

5 BUILD AND EXPORT A MODEL IN FLUX® 2D ENVIRONMENT

5.1 Overview

The aim of this export is to provide a python file which allows to get a full parametrized model ready to be used in Flux® 2D environment. In the current version, models can be exported for static application or transient application in Flux® 2D environment.

Three models can be exported to Flux® 2D environment:

Application	Model family	Package	Convention	Model / Test
STATIC	Without solving scenario	Current source	Motor & Generator	Basic model
	Working point	Sine wave	Motor	I-Ψ-N
TRANSIENT	Working point	Sine wave	Motor	I-Ψ-N (Hairpin)

Note: These models are considered for inner rotor machines as well as for outer rotor machines.

5.2 Area to build and to export a model to Flux® 2D environment

Motor Factory – EXPORT AREA – Export model for Flux® 2D environment

1	Selection of the EXPORT area of Motor Factory.
2	Access the area in which a model for Flux® 2D environment can be made
3	Zone to visualize the overview of the selected model to be exported
4	Click on the tab to select the application (STATIC or TRANSIENT)
5	3 steps to build the model to be exported for Flux® 2D environment
6	Button to validate inputs before building the model in Flux® 2D environment.
7	Exports the python file for building the model in Flux® 2D environment or launch the project directly in Flux® 2D.

5.3 Steps to build and export a model to Flux® 2D environment

In EXPORT / ADVANCED TOOLS / FLUX2D area, one must indicate that on which application of Flux® 2D environment, the models must be built: static application or transient application.


Then, the 3 next steps are:

- 1) Define the type of scenario one wants to get in Flux® 2D environment (Test selection).
This means the simulation, that one wants to perform in Flux® 2D environment for evaluating the electromagnetic behavior of the considered machine.
- 2) Define the test configuration. This is to give an initial value for the user inputs, which will be set in the scenario of the simulation available in the Flux® 2D model.

Note: For each Flux® 2D model available in the current version, a short description of the user inputs is done in the following sections.

- 3) Define the export information.

The resulting models are fully parameterized, and these are built in Flux® 2D environment for static or transient applications.

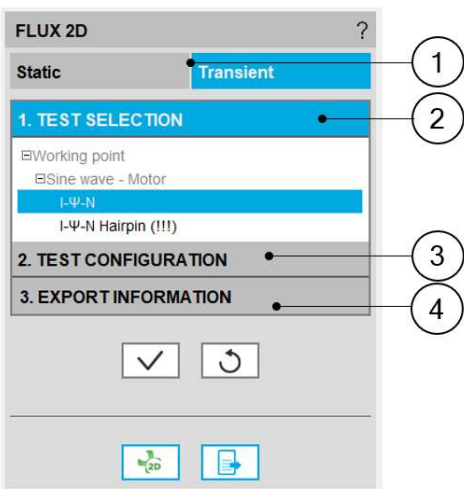


The screenshot shows the 'FLUX 2D' export dialog box. It has a title bar with a question mark. Inside, there are two radio buttons: 'Static' and 'Transient', with 'Transient' selected (callout 1). Below is a section '1. TEST SELECTION' with a list of options: 'Working point', 'Sine wave - Motor', 'I-ψ-N' (selected), and 'I-ψ-N Hairpin (!!!)' (callout 2). Below that is '2. TEST CONFIGURATION' (callout 3) and '3. EXPORT INFORMATION' (callout 4). At the bottom are checkmark and refresh buttons, and two icons at the very bottom.

Motor Factory – EXPORT AREA – Export model for Flux® 2D environment	
1	Select application (STATIC or TRANSIENT) in which the model must be built in Flux® 2D
2	Choose one scenario (or test) to be provided
3	Define the initial conditions for the simulation process in Flux® 2D environment
4	Define export information

5.4 Test selection

After selecting an application type (STATIC or TRANSIENT), the corresponding test inputs (settings and user inputs) must be defined. This allows to define the initial conditions for testing.

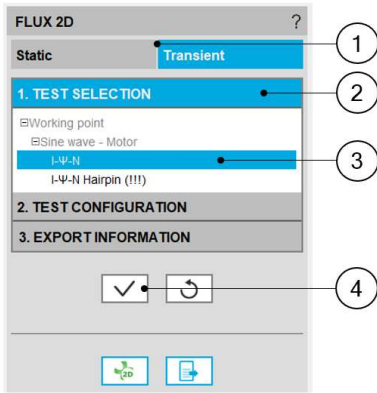


Motor Factory – EXPORT AREA – Export a model for Flux® 2D – Test selection	
1	Selection of application (STATIC or TRANSIENT) in which the model must be built for Flux® 2D
2	Tab to choose one scenario (or test) to be provided
3	Selection of the scenario (or test) to be provided
4	Button to validate the previous choices

Note: The user help information about the test parameters is defined in the user help guide of the corresponding test. Please refer to the corresponding section.

5.5 Test configuration

After selecting an application type (STATIC or TRANSIENT), the corresponding scenario (or test) inputs (settings and user inputs) must be defined. This allows to define the initial conditions for the simulation process in Flux® 2D environment.

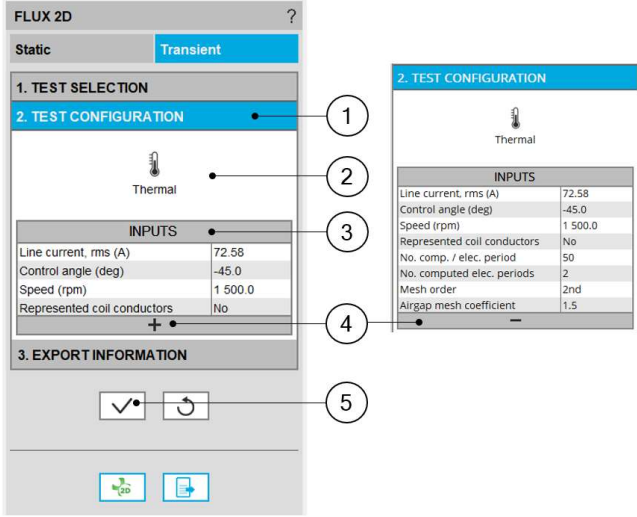


Motor Factory – EXPORT AREA – Export a model for Flux® 2D -	
1	Tab to define the initial conditions for the simulation process in Flux® 2D environment
2	Settings like thermal conditions can be defined
3	User inputs dealing with the considered test can be defined
4	The tab corresponding to advanced parameters can be expanded. Advanced parameters can also be defined if needed.
5	Button to validate the previous choices

5.6 Export information


The last step for building a model for Flux® 2D is to define the export information. There are three data to be defined:

- The name of the python file which will build the model in Flux® 2D environment.
- The folder in which the provided file must be stored.
- The last answer “Full geometry “ allows the user to get a full geometry in the provided model, even if it is possible to work with a reduced model considering the number of poles and the number of slots.

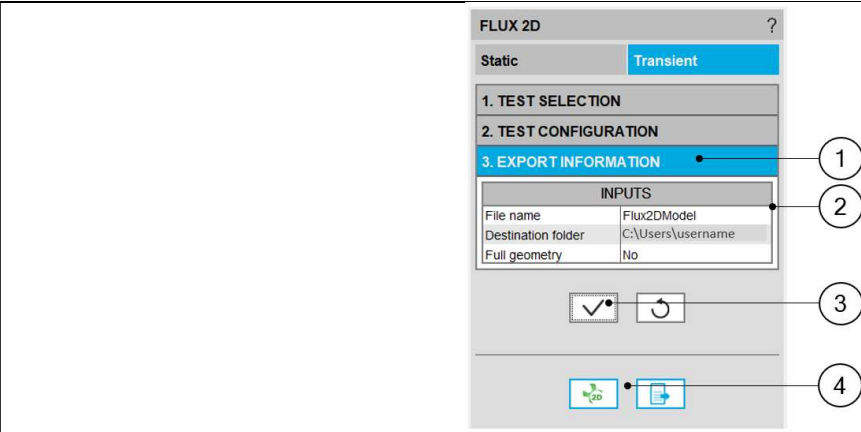

Motor Factory – EXPORT AREA – Export model for Flux® 2D – Export information	
1	Tab to be expanded to define export information for Flux® 2D
2	Area in which the export parameters to be defined are listed
3	Button to validate the previous choices
4	Button to finalize the export of the model. When one clicks on this button, the folder gets opened where the python file to build the model is stored.

Note 1: When data is missing in the third table; “Export information” for instance, an error message is displayed in the red colored font which indicates what data is missing. If all the needed information is missing, exporting a model is not allowed.

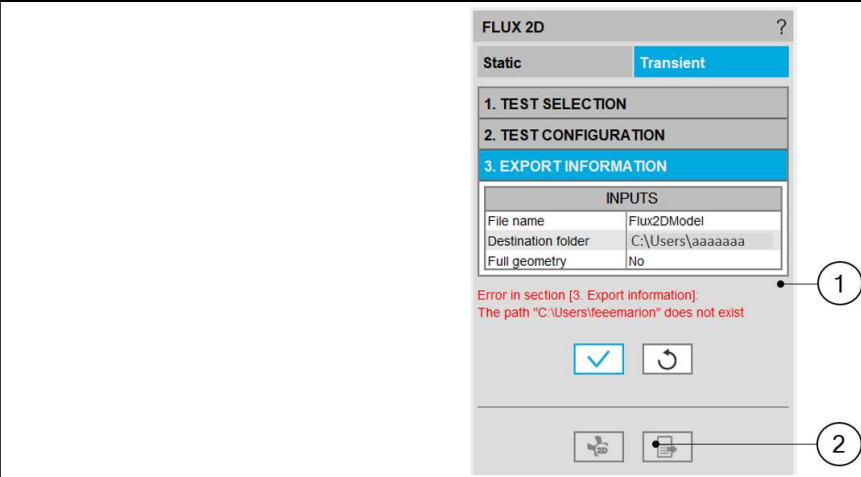

Motor Factory – EXPORT AREA – Export model for Flux® 2D – Error message	
1	Error message display in red colored font.
2	The button to export the model is not active if all the needed data are missing

Note: Exporting a model to Flux® 2D (i.e. provide the python file to build the model) can take a few seconds. This is since parameters like initial position of the rotor must be computed first by using internal processes, and then the simulation scenario must be considered.

5.7 Available models to be exported and user inputs.

5.7.1 Overview

All the models to be exported are first classified by considering the type of application, for which they are built (STATIC or TRANSIENT). Then, for the tests in Motor Factory Test environment, the models are associated with a convention of operating (Motor or Generator) and grouped into packages itself to get classified into model families.

In the current version of FluxMotor® three models can be exported to Flux® 2D environment:

Application	Model family	Package	Convention	Model / Test
STATIC	Without solving scenario	Current source	Motor & Generator	Basic model
TRANSIENT	Working point	Sine wave	Motor	I-Ψ-N
	Working point	Sine wave	Motor	I-Ψ-N (Hairpin)


The following section give a short description of all the models available for exportation to Flux® 2D environment.

5.7.2 Without scenario – Current source – Motor and generator – Basic model

5.7.2.1 Positioning and objective

This export allows the users to build a model in Flux® 2D, static application to perform magneto-static and multi-static simulations. User inputs like, line current and control angle are predefined to get quick access into Flux® 2D environment for performing computations.

The resulting model is fully parameterized, and it is built in Flux® 2D environment, static application.

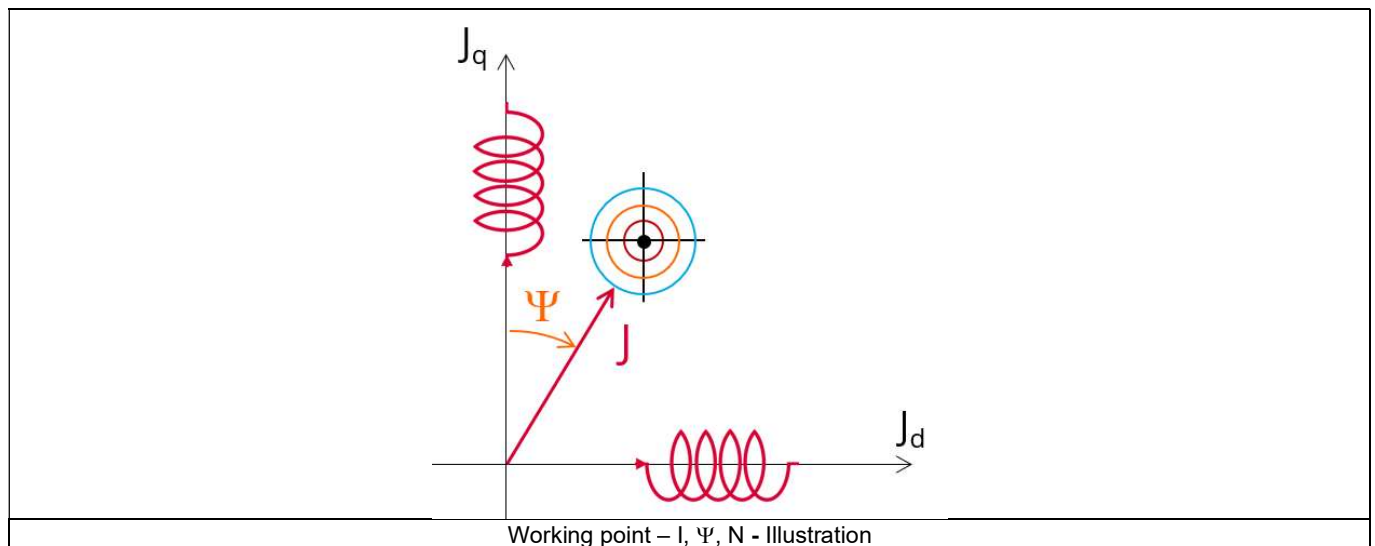

The following section describes all the user inputs to initialize the exported model. All these parameters can be modified in Flux® 2D environment, if needed.

5.7.2.2 Settings

There are no settings to be defined.

5.7.2.3 Standard inputs


1) Line current, rms

The line current supplied to the machine: **“Line current, rms”** (*Line current, rms value*) must be provided.

2) Control angle

Considering the vector diagram shown below, the **“Control angle”** is the angle between the Q-axis and the electrical current (J) ($\Psi = (J_q, J_d)$).

It is an electrical angle. The default value is 45 degrees. It must be set in a range of -90 to 90 degrees. This range of values covers all the possible working point in motor convention.

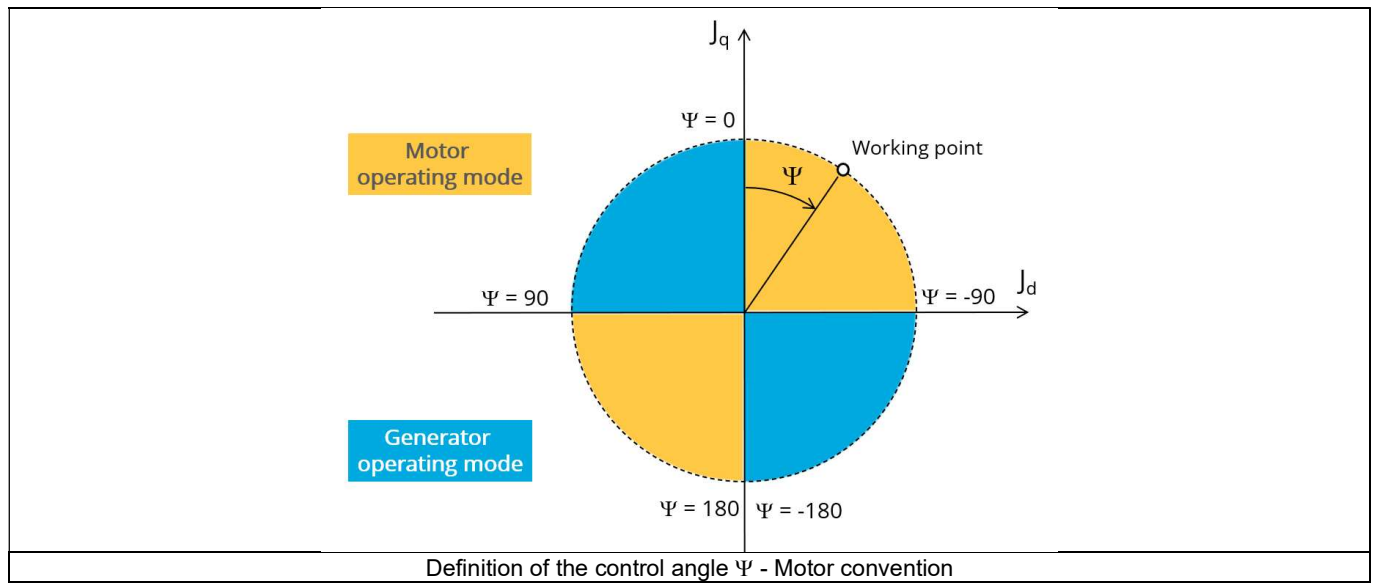

5.7.2.4 Advanced inputs

The list of advanced inputs dedicated to this export are listed below.

For more details, please refer to the section 5.7.5 - List of generic advanced inputs.

1) Mesh order

The default level is second order mesh.

2) Airgap mesh coefficient

Airgap mesh coefficient is set to 1.5 by default.

3) Rotor d-axis location

The computations are performed by considering a relative angular position between rotor and stator.

For the reluctance synchronous machines, the rotor d-axis location is defined and automatically used to perform computations. This value is characterized by the saliency topology. This is important to keep in mind this information it.


For more details, please refer to the document: MotorFactory_SMRSM_IR_3PH_Test_Introduction – section “Rotor and stator relative position”.

5.7.3 Working point – Sine wave – Motor – I , Ψ , N

5.7.3.1 Positioning and objective

The aim of the test **“Working point – Sine wave – Motor – I , Ψ , N ”** is to characterize the behavior of the machine when operating at the targeted input values I , Ψ , N (Magnitude of current, Control angle, Speed). Hence, these three inputs are enough to impose a precise working point.

The resulting model is fully parameterized, and it is built in Flux® 2D environment, transient application.

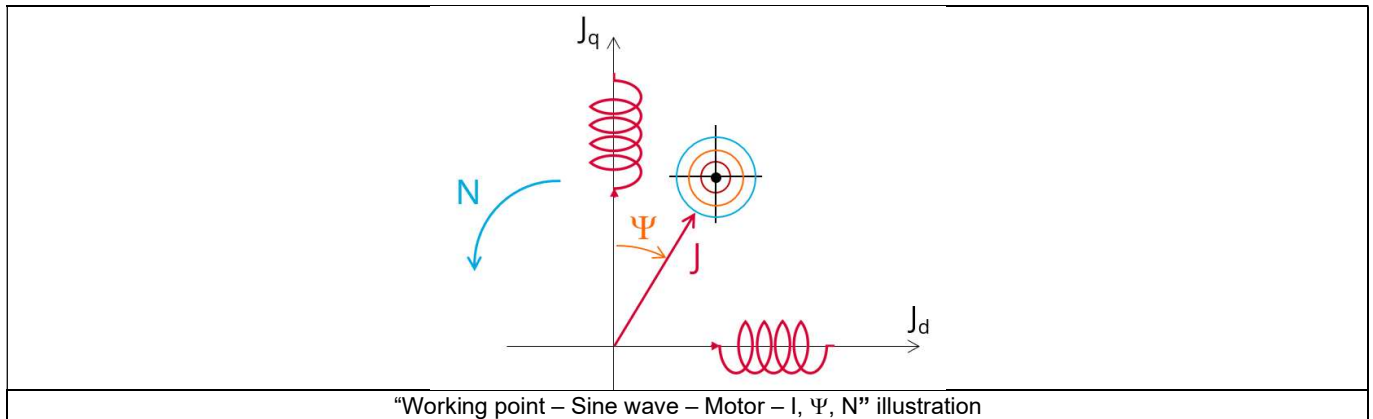

The results of this test give an overview of the electromagnetic analysis of the machine considering its topology. It also gives the capability to make comparisons between results obtained from the measurements and those with the FluxMotor®.

The following section describes all the user inputs to initialize the exported model. All these parameters can be modified in Flux® 2D environment, if needed.

5.7.3.2 Settings

One button gives access to the following setting definition:

- Winding temperatures

5.7.3.3 Standard inputs


1) Line current, rms

The line current supplied to the machine: **"Line current, rms"** (*Line current, rms value*) must be provided.

2) Control angle

Considering the vector diagram shown below, the **"Control angle"** is the angle between the electromotive force E and the electrical current (J) ($\Psi = (E, J)$).

It is an electrical angle. The default value is 45 degrees. It must be set in a range of -90 to 90 degrees. This range of values covers all the possible working point in motor convention.

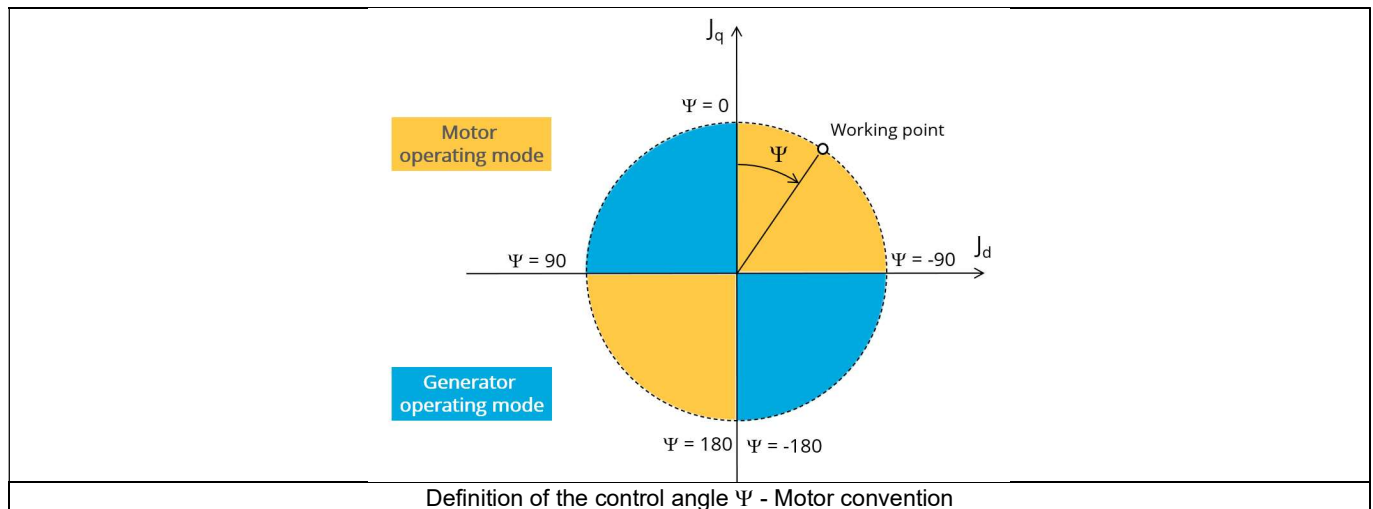

3) Speed

The imposed **"Speed"** (*Speed*) of the machine must be set.

4) Represented coil conductors.

In transient application, it is possible to export a project into Flux® environment, where the elementary wires will be modeled with solid conductors. The geometry, the meshing and the corresponding electric circuit will be defined to well represent these.

Three choices are possible:

- "No": The coils will be represented with face regions. The elementary wires won't be represented in the Finite Element model (Flux®).
- "One phase": The elementary wires will be represented for only one phase. This will allow to compute AC losses for conductors into the first phase. This choice allows to get a good ratio between the quality of results and computation time.
- "All phases": The elementary wires will be represented into all the phases.

5.7.3.4 Advanced inputs

The list of advanced inputs dedicated to this export are listed below.

For more details, please refer to the section 5.7.5 - List of generic advanced inputs.

1) Number of computations per electrical period

The default value is equal to 50. The minimum allowed value is 13.

2) Number of computed electrical periods

The default value is equal to 2. The minimum allowed value is 1 and the maximum value is equal to 10.

3) Mesh order

The default level is second order mesh.

4) Airgap mesh coefficient

Airgap mesh coefficient is set to 1.5 by default.

5.7.4 Working point – Sine wave – Motor – I, Ψ , N - Hairpin

5.7.4.1 Positioning and objective

The aim of the test “**Working point – Sine wave – Motor – I, Ψ , N – Hairpin**” is to characterize the behavior of the machine when operating at the targeted input values I, Ψ , N (Magnitude of current, Control angle, Speed) in case of the machine is built with a hairpin winding technology.

The resulting model is fully parameterized, and it is built in Flux® 2D environment, transient application.

Note: The same principle than for the test “Working point – Sine wave – Motor – I, Ψ , N” is applied. Inputs are the same, but in that case only “All phases” option is available for defining the represented coil conductors.

5.7.5 List of generic advanced inputs

1) Number of computations per electrical period

The number of computations per electrical period “**No. comp. / elec. period**” (Number of computations per electrical period) influences the accuracy of results and the computation time.

The default value is 50. The minimum allowed value is 13. This default value provides a good compromise between the accuracy of results and computation time.

2) Number of computed electrical periods

The default value is 2. The minimum allowed value is 1 and the maximum value is equal to 10.

3) Mesh order

To get results, Finite Element Modelling computations are performed.

The geometry of the machine is meshed.

Two levels of meshing can be considered: First order and second order.

This parameter influences the accuracy of results and the computation time.

The default level is second order mesh.

4) Airgap mesh coefficient

The advanced user input “**Airgap mesh coefficient**” is a coefficient which adjusts the size of mesh elements inside the airgap. When one decreases the value of “**Airgap mesh coefficient**”, the size of the mesh elements reduces, thus increasing the mesh density inside the airgap and the accuracy of results.

The imposed Mesh Point (size of mesh elements touching points of the geometry), inside the Flux® software, is described as:

$$\text{MeshPoint} = (\text{airgap}) \times (\text{airgap mesh coefficient})$$

Airgap mesh coefficient is set to 1.5 by default.

The variation range of values for this parameter is [0.05; 2].

0.05 gives a very high mesh density, and 2 gives a very coarse mesh density.

Caution:

Be aware, a very high mesh density does not always mean a better result quality. However, this always leads to a huge number of nodes in the corresponding finite element model. So, it means the need of huge numerical memory, and the respective computation time increases considerably.

5) Rotor d-axis location

The computations are performed by considering a relative angular position between rotor and stator.

For the reluctance synchronous machines, the rotor d-axis location is defined and automatically used to perform computations.

This value is characterized by the saliency topology. This is important to keep in mind this information it.

For more details, please refer to the document: MotorFactory_2022.1_SMRSM_IR_3PH_Test_Introduction – section “Rotor and stator relative position”.

6 BUILD AND EXPORT A MODEL IN FLUX® SKEW ENVIRONMENT

6.1 Overview

The aim of this export is to provide a python file which allows to get a full parametrized model ready to be used in Flux® SKEW environment.


All the models to be exported are first classified by considering the type of application for which they are built (STATIC or TRANSIENT). Then, for the tests in Motor Factory Test environment, the models are associated with a convention of operating (Motor or Generator) and grouped into packages itself to get classified into model families.

In the current version of FluxMotor® two models can be exported to Flux® SKEW environment:

Application	Model family	Package	Convention	Model / Test
STATIC	Without solving scenario	Current source	Motor & Generator	Basic model
TRANSIENT	Working point	Sine wave	Motor	I-Ψ-N

The following section give a short description of all the models available for exportation to Flux® 2D environment.

6.2 Area to build and to export a model to Flux® SKEW environment.

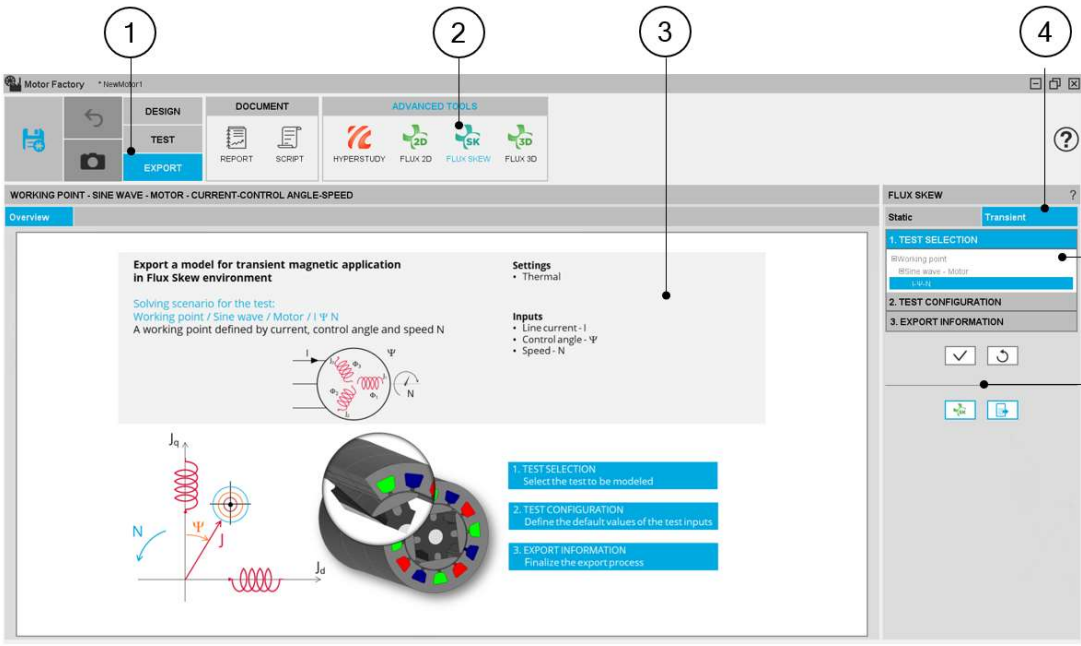

Motor Factory – EXPORT AREA – Export model for Flux® Skew environment

1	Selection of the EXPORT area of Motor Factory.
2	Access to the area in which a model for Flux® Skew environment can be made
3	Zone to visualize the overview of the selected model to be exported
4	Click on the tab to select the application (STATIC or TRANSIENT)
5	3 steps to build the model to be exported for Flux® Skew environment
6	Buttons to validate inputs and export the python file for building the model in Flux® Skew environment.

6.3 Particularities in building and to exporting a model to Flux® SKEW environment.

A user who wants to build and export a model to Flux® SKEW must follow the same steps and recommendations as with the function “FLUX 2D”.

The main particularity of function “FLUX SKEW” is that the “**Skew number of layers**” is an input, that must be defined. Its default value is 3.
Even if the design of the machine is defined with “continuous skew”, the “**Skew number of layers**” is necessary for Flux® to define the finite elements model in the FLUX SKEW environment. A high number of layers gives more accurate finite elements computations. However, it needs higher computation time. For that purpose, the value 3 is a good compromise between accuracy and speed.

FLUX SKEW

StaticTransient

1. TEST SELECTION

2. TEST CONFIGURATION

Thermal

INPUTS

Line current, rms (A)72.58

Control angle (deg)-45.0

Speed (rpm)1 500.0

3. EXPORT INFORMATION

✓↺

2. TEST CONFIGURATION

Thermal

INPUTS

Line current, rms (A)72.58

Control angle (deg)-45.0

Speed (rpm)1 500.0

Skew model - No. of layers3

No. comp. / elec. period50

No. computed elec. periods2

Mesh order1st

Airgap mesh coefficient1.5

Motor Factory – EXPORT AREA – Export a model for Flux® SKEW

1	Tab to define the initial conditions for the simulation process in Flux® SKEW environment
2	Settings like thermal and mechanical conditions can be defined
3	User inputs dealing with the considered test can be defined
4	The tab corresponding to advanced parameters can be expanded. Advanced parameters can also be defined, if needed.
5	Button to validate the previous choices

7 BUILD AND EXPORT A MODEL IN ALTAIR® FLUX® 3D ENVIRONMENT.

7.1 Overview

The aim of this export is to provide a python file which allows to get a fully parametrized model ready to be used in Altair® Flux® 3D environment.

In the current version of FluxMotor® the only application type available for Flux® 3D export is STATIC.

Application	Model family	Package	Convention	Model / Test
STATIC	Without solving scenario	Current source	Motor & Generator	Basic model

The following section gives a short description of the process to export the model into Flux® 3D environment.

7.2 Area to build and to export a model to Flux® 3D environment.

Motor Factory – EXPORT AREA – Export model for Flux® 3D environment

1	Selection of the EXPORT area of Motor Factory.
2	Access to the area in which a model for Flux® 3D environment can be made
3	Zone to visualize the overview of the selected model to be exported
4	Click on the tab to select the application (in the current version, only STATIC is available)
5	Different lengths for rotor and stator can be chosen by clicking on this tab.
6	3 steps to build the model to be exported for Flux® Skew environment
7	Buttons to validate inputs and export the python file for building the model in Flux® Skew environment.
8	Buttons to export the python file for building the model in Flux® 3D environment or to launch directly Flux® 3D.

7.3 Particularities in building and exporting a model to Flux® 3D environment.

A user who wants to build and export a model to Flux® 3D must follow the same steps and recommendations, as with the function “FLUX 2D”.

The main particularity of function “FLUX 3D” is that rotor and stator axial lengths are the inputs, that must be defined. Their default values equal the machine length defined in “Design”. These two lengths can be different.

FLUX 3D

Export

Lengths

Static

1. TEST SELECTION

2. TEST CONFIGURATION

3. EXPORT INFORMATION

INPUTS

File name

Flux3DModel

Destination folder

C:\Users

Full geometry

No

Symmetry

Yes

☒

1

2

3

4

5

FLUX 3D

Export

Lengths

STATOR

Outer diameter (mm)

270.0

Inner diameter (mm)

169.0

Stator length (mm)

80.0

No. slots

36

ROTOR

Outer diameter (mm)

163.6

Inner diameter (mm)

50.0

Rotor length (mm)

80.0

No. poles

4

☒

Motor Factory – EXPORT AREA – Export a model for Flux® 3D

1	Tab selector to define general export parameters and axial lengths in Flux® 3D environment
2	Table containing stator topology features. Stator length may be modified.
3	Table containing rotor topology features. Rotor length can be modified.
4	To reduce computation time in Flux® 3D, full geometry and symmetry options are offered. By default, these options are set to assure minimum computation time without accuracy loss.
5	Button to validate the previous choices

Note 1: Default values for rotor, stator and magnet lengths are equal to the machine design length. However, a change in these values only affects the Flux® 3D export and it **never** changes the design length value.

Note 2: Symmetry allows to represent only half of the topology in the axial direction, saving the simulation time. This option is available only when all the dimensions are equal on both sides of the machine (Connection Side and Opposite Connection Side), especially for the end winding dimensions.

A warning message is provided in the “Design environment” each time an asymmetric topology is defined, to inform the user that the Flux® 3D export input “symmetry” has been set to “No”. This also occurs when the asymmetry is due to the end shafts, even if they are not represented in the 3D environment.

Note 3: Export to Flux® 3D is not available for skewed topologies. In this case Flux® SKEW export is recommended.

8 BUILD AND EXPORT A MODEL IN ALTAIR FLOW SIMULATOR ENVIRONMENT


8.1 Overview

The aim of this export is to provide a “.flo” file which allows to get a machine model ready to be used in Altair® Flow Simulator™ environment which will allow to represent the thermal behavior of the machine through a customizable lumped thermal parameter model coupled with a flow network when necessary.

In the current version of Altair® FluxMotor® the tests available for Flow Simulator export are the steady state and the transient thermal analysis for three-phase inner rotor SMPM, SMRSM and IMSQ.

The following section gives a short description of the process to export the model into Flow Simulator environment.

8.2 Area to build and to export a model to Flow Simulator environment

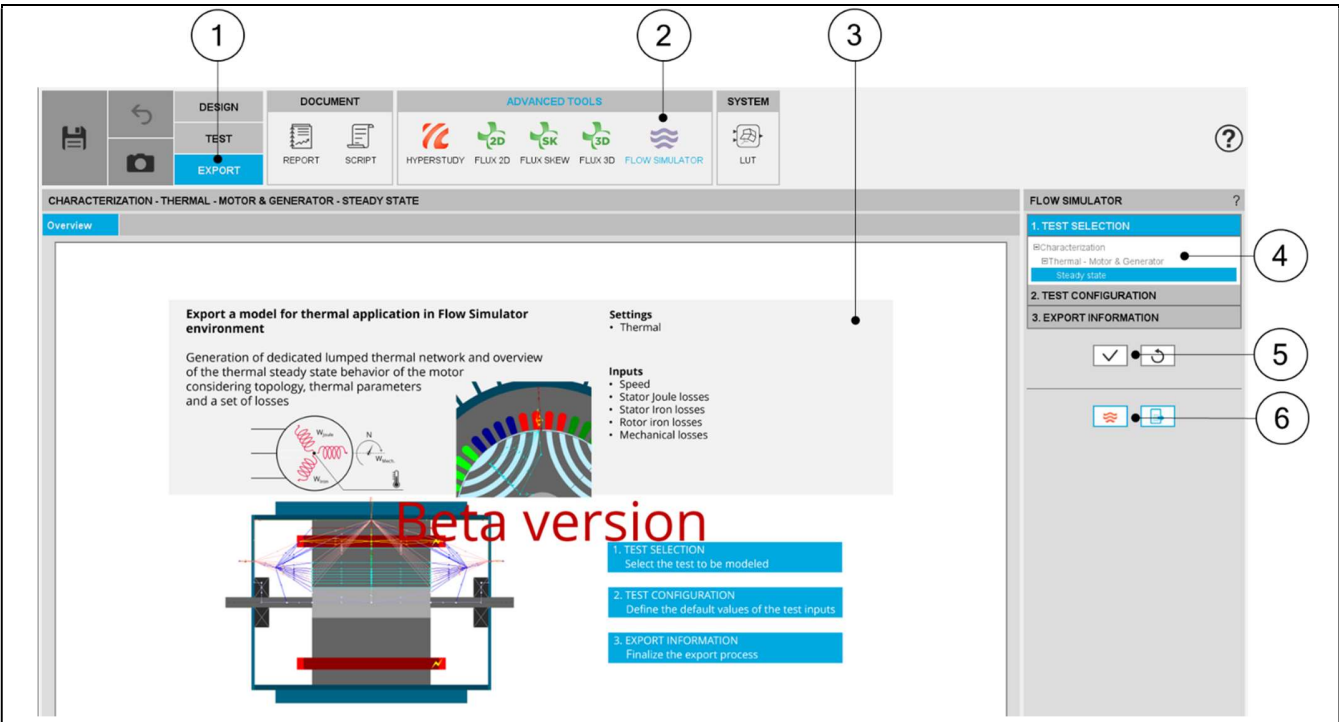

Motor Factory – EXPORT AREA – Export model for Flow Simulator environment

1	Selection of the EXPORT area of Motor Factory.
2	Access to the area in which a model for Flow Simulator environment can be made
3	Zone to visualize the overview of the selected model to be exported. Zone to visualize the overview of the selected model to be exported. Currently, there are two models: thermal analysis in steady state and one in transient. The one in transient is in beta mode.
4	3 steps to build the model to be exported for Flow Simulator environment
5	Button to validate the inputs.
6	Buttons to export the “.flo” file for building the model in Flow Simulator environment or to launch directly Flow Simulator

Note 1: “. flo” files are text files used by Flow Simulator to stock all the information about a project, e.g., the background images, the thermal/flow network components including their values, placements, etc.

8.3 Steps to build an export Flow Simulator

8.3.1 Introduction

In EXPORT / ADVANCED TOOLS / FLOW SIMULATOR area, 3 steps are needed to build and export data:

- 1) Define the thermal model to be exported into Flow Simulator™. For the moment only the thermal steady state model is available.
- 2) Define the test configuration, that means the user inputs/outputs parameters needed to perform the test (settings and user inputs of the considered test)
- 3) Define the export information.


8.3.2 Test selection

In the current version of FluxMotor[®], one test can be selected:

- Characterization / Thermal – Motor & Generator / Steady State
- Characterization / Thermal – Motor & Generator / Transient

8.3.3 Test configuration

After selecting the test, the corresponding test inputs (settings and user inputs) must be defined. This allows us to define the initial conditions for the simulation process in Flow Simulator™ environment.

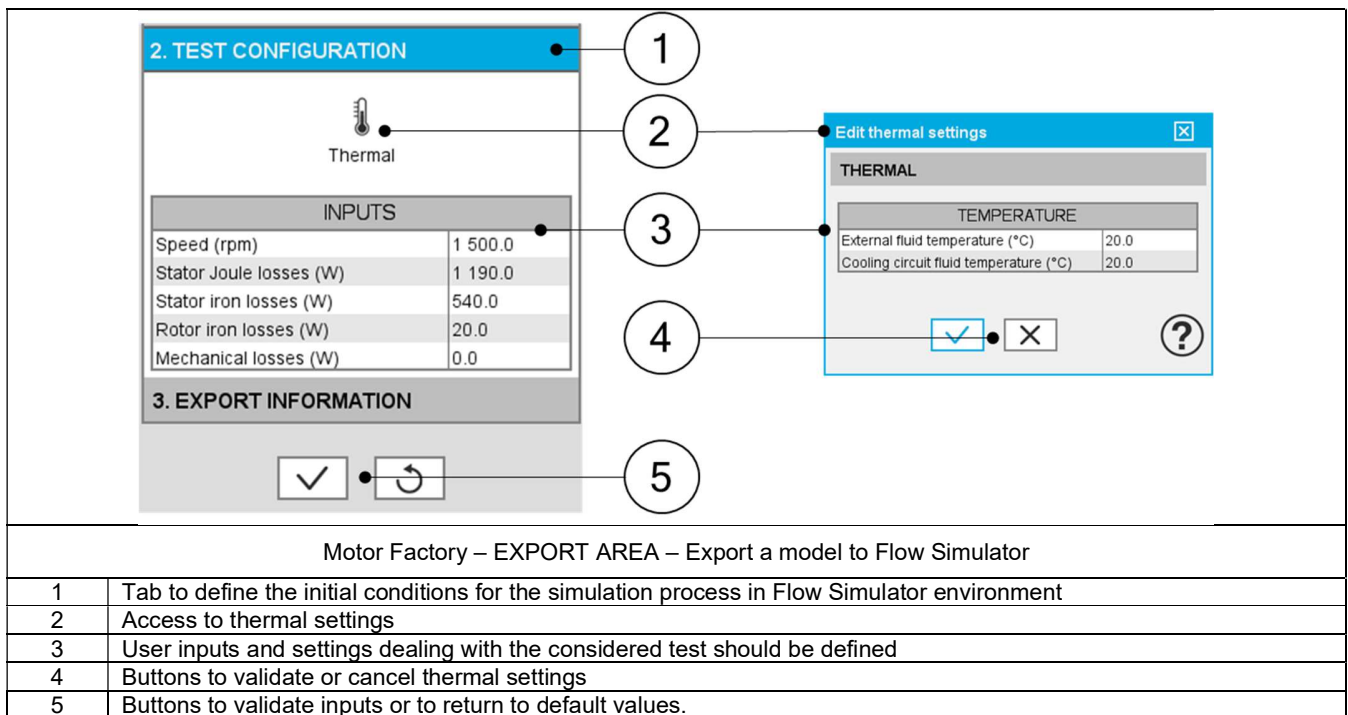

8.3.4 Export information

The last step for building a model for Flow Simulator is to define the export information. There are two data to be defined:

- The name of the “.flo” file which will build the model in Flow Simulator environment.
- The folder in which the provided file will be stored.

FLOW SIMULATOR ?

1. TEST SELECTION

2. TEST CONFIGURATION

3. EXPORT INFORMATION

INPUTS

File nameFlowSimModel

Destination folderC:\Users

✓↺

⚡📁

1

2

3

4

5

Motor Factory – EXPORT AREA – Export model for Flow Simulator – Export information

1	Tab to be expanded to define export information for Flow Simulator
2	Area in which the export parameters to be defined are listed
3	Button to validate the previous choices
4	Button to finalize the export of the model. It opens the folder where the “.flo” file is generated.
5	Button to finalize the export of the model. It launches Flow Simulator and builds the model.

Note 1: When data is missing / wrong in third table; “Export information” for instance, an error message is displayed in the red colored font which indicates what data is missing / wrong. If needed information is missing, exporting a model is not allowed.

FLOW SIMULATOR ?

1. TEST SELECTION

2. TEST CONFIGURATION

3. EXPORT INFORMATION

INPUTS

File nameFlowSimModel

Destination folderC:\User

Error in section [3. Export information]:
The path "C:\User" does not exist

✓↺

⚡📁

1

2

Motor Factory – EXPORT AREA – Export model for Flow Simulator – Error message

1	Error message displayed in the red colored font.
2	The button to export the model is not active if the needed data are missing.

Note 2: Exporting a model to Flow Simulator (i.e. provide the “.flo” file to build the model) can take a few seconds, since it is necessary to run some pre-calculations to build the lumped parameter thermal model.

8.4 Available models to be exported and user inputs

8.4.1 Overview

In the current version only one Flow Simulator export is available the steady state thermal analysis for three-phase inner rotor SMPM. Thermal transient export and more machine types will be addressed in future versions.

8.4.2 Characterization – Thermal -Motor & Generator – Steady State

8.4.2.1 Positioning and objective

The aim of this export is to represent the steady state thermal behavior of the machine through a customizable lumped thermal parameter model coupled with a flow network when necessary.

The resulting model is a 3D representation of a steady state thermal circuit built in Flow Simulator, it corresponds to the thermal model used in Flux Motor to run both, thermal and coupled tests.

The following section describes all the user inputs and settings to initialize the exported model.

8.4.2.2 Settings

One button gives access to the following setting definition:

- External fluid temperature
- Cooling circuit fluid temperature

For more details, refer to the section dealing with the test settings.

8.4.2.3 Standard inputs

1) Speed

The speed of the machine to be considered.

2) Set of losses

The losses to be defined are the following ones:

- Stator Joule losses
- Stator iron losses
- Magnet losses
- Rotor iron losses
- Mechanical losses

8.4.2.4 Advanced inputs

There are no advanced inputs required for this export.

8.4.3 Characterization – Thermal - Motor & Generator – Transient

8.4.3.1 Positioning and objective

The aim of this export is to represent the transient thermal behavior of the machine through a customizable lumped thermal parameter model coupled with a flow network when necessary.

The resulting model is a 3D representation of a transient thermal circuit built in Flow Simulator™, it corresponds to the thermal model used in Flux Motor® to run both, thermal and coupled tests.

The following section describes all the user inputs and settings to initialize the exported model.

8.4.3.2 Settings

One button gives access to the following setting definition:

- External fluid temperature
- Cooling circuit fluid temperature

For more details, refer to the section dealing with the test settings.

8.4.3.3 Standard inputs

1) Speed

The speed of the machine to be considered.

2) Set of losses

The losses to be defined are the following ones:

- Stator Joule losses
- Stator iron losses
- Rotor iron losses
- Mechanical losses

3) Time definition

The time during which the test is performed, defined by:

- Maximum evaluation duration
- Time step

8.4.3.4 Advanced inputs

There are no advanced inputs required for this export.

9 EXPORT TO SYSTEM

9.1 Overview

The area SYSTEM, in the EXPORT environment of Motor Factory, allows exporting data like constants, curves and maps in lookup table (LUT) formats, such as FMU and MAT format files.

In the current version, the test Characterization/Model/Maps can be selected for exporting the data.


Constants, curves and maps" given in J_d - J_q plane, for characterizing the 3-Phase synchronous machines with permanent magnets are computed and exported.

These files can be imported directly into environments like Altair® Activate®, Altair® Compose® or Altair® PSIM® as binary variables files (.mat) or inside block functions, ready to be integrated into schemes to represent the model of the corresponding rotating electrical machine.

These functionalities are useful to represent the machine at the system level. Therefore, electrical machine and other system components, such as the drive and the control command, can be represented and simulated altogether into the same area.

Note: This functionality is not implemented for polyphase machines. It will be addressed in a future version.

9.2 Area to export LUT

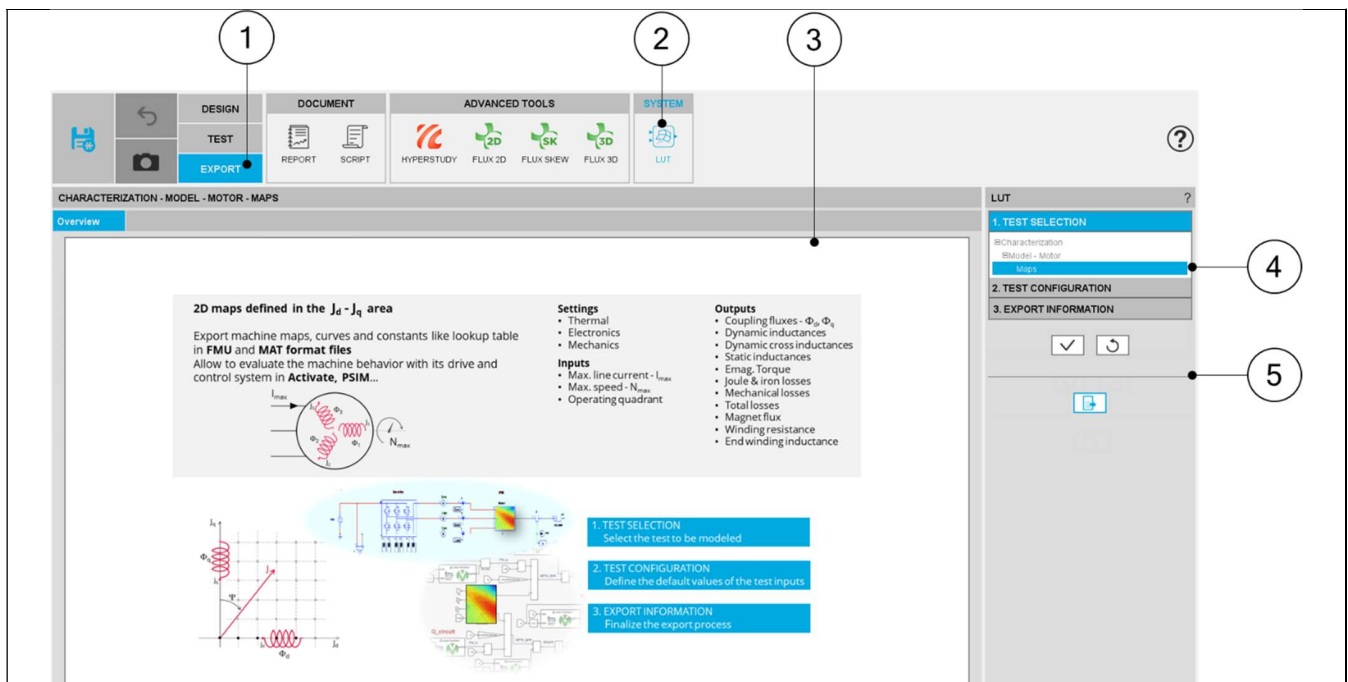

Motor Factory – EXPORT AREA – Export data in LUT formats.

1	Selection of the EXPORT area of Motor Factory.
2	Access the area (SYSTEM) in which data can be exported in lookup table (LUT) formats.
3	Zone to visualize either the overview of the selected test
4	3 steps to compute and to export LUT data
5	Button to validate inputs, display a preview and export the data.

9.3 Steps to build an export LUT

9.3.1 Introduction

In EXPORT / ADVANCED TOOLS / SYSTEM area, 3 steps are needed to build and export data:

- 1) Select the test which will be performed for building data to be exported.
- 2) Define the test configuration, that means the user inputs/outputs parameters needed to perform the test (settings and user inputs of the considered test)
- 3) Define the export type (FMU or MAT formats) and information.

9.3.2 Test selection

In the current version of FluxMotor®, one test can be selected:

- Characterization / Model / Motor / Maps

9.3.3 Test configuration

After selecting a test, the corresponding test inputs (settings and user inputs) must be defined. This allows to define the initial conditions for testing.

1


CHARACTERIZATION - MODEL - MOTOR - MAPS

Overview

2D maps defined in the $J_d - J_q$ area

Export machine maps, curves and constants like lookup table in **FMU** and **MAT** format files

Allow to evaluate the machine behavior with its drive and control system in **Activate**, **PSIM**...



Settings

- Thermal
- Electronics
- Mechanics

Inputs

- Max. line current - I_{line}
- Max. speed - N_{max}
- Operating quadrant

Outputs

- Coupling fluxes - Φ_{d1}, Φ_{q1}
- Dynamic inductances
- Static inductances
- Emag. Torque
- Joule & iron losses
- Mechanical losses
- Total losses
- Magnet flux
- Winding resistance
- End winding inductance

3

INPUTS

Operating quadrants2nd

Max. current dens., rms (A/mm2)2nd

Maximum speed (rpm)1st & 2nd

Rotor position dependencyAll

No. computed elec. periods1

2

LUT

1. TEST SELECTION

2. TEST CONFIGURATION

Thermal Electronics Mechanics Import

INPUTS

Operating quadrants1st

Max. current dens., rms (A/mm2)6.3

Maximum speed (rpm)1 000.0

Rotor position dependencyNo

No. computed elec. periods-

No. comp. / elec. period-

No. comp. for Jd, Jq10

No. comp. for speed10

Rotor initial position (deg)0.0

Mesh order2nd

Airgap mesh coefficient1.5

3. EXPORT INFORMATION

4

LUT

1. TEST SELECTION

2. TEST CONFIGURATION

Thermal Electronics Mechanics Import

INPUTS

Operating quadrants1st

Max. current dens., rms (A/mm2)6.3

Maximum speed (rpm)1 000.0

Rotor position dependencyNo

No. computed elec. periods-

No. comp. / elec. period-

No. comp. for Jd, Jq10

No. comp. for speed10

Rotor initial position (deg)0.0

Mesh order2nd

Airgap mesh coefficient1.5

3. EXPORT INFORMATION

Motor Factory – EXPORT AREA – SYSTEM – LUT / Test configuration for Characterization / Model / Motor / Maps

1	Overview of the selected test is displayed
2	User inputs can be defined in the test area.
3	User's inputs to export data based on 1, 2 or 4 quadrants
4	User's inputs to export data with respect to the rotor position dependency.

Note: The user help information about the test parameters is defined in the user help guide of the corresponding test. Please refer to the corresponding section.

Note: Operating quadrants

Export / System LUT (Activate or PSIM) allows exporting data based on 1, 2 or 4 quadrants.

This user's input defines the quadrants in the $J_d - J_q$ plane, where the test will be carried out. By default, the only considered quadrant is the 1st one (i.e., the grid is defined for positive values of the current in the d axis and positive ones in the q axis). This corresponds to the motor behavior of the machine.

The other possible values for this input are: "2nd and 3rd ", "1st and 2nd "and "all". Options allow computing and displaying 1, 2 or 4 quadrants.

Note: Rotor position dependency

Export / System LUT (Activate or PSIM) allows exporting data with respect to the rotor position dependency.

This user's input defines the rotor position dependency, where the test will be carried out. By default, the rotor position dependency is set to "No" but it can be set to "Yes". In this case the computation will be done in the $J_d - J_q$ plane with an additional fourth axis corresponding to the rotor position θ_r .

In case the rotor dependency is set to "Yes", whatever the operating quadrant choice, the finite element computation is done over all selected quadrants (in case the rotor dependency is set to "No", symmetries are used).

9.3.4 Export information

The last step for building and exporting data in FMU format files is to define the export information.

Three inputs must be defined:

- The name of the directory in which the created files will be stored
- The format of the file to be exported. Three options are available: FMU for Activate, FMU generic and MAT file - for Activate and PSIM.
- The destination folder in which the previous directory will be located

DESIGNDOCUMENTADVANCED TOOLSSYSTEM

TESTEXPORTREPORTSCRIPTHYPERSTUDYFLUX 2DFLUX SKEWFLUX 3DLUT


CHARACTERIZATION - MODEL - MOTOR - MAPS

Overview

2D maps defined in the $J_d - J_q$ area

Export machine maps, curves and constants like lookup table in FMU and MAT format files

Allow to evaluate the machine behavior with its drive and control system in Activate, PSIM...



Settings

- Thermal
- Electronics
- Mechanics

Inputs

- Max. line current - I_{max}
- Max. speed - N_{max}
- Operating quadrant

Outputs

- Coupling fluxes - Φ_d, Φ_q
- Dynamic inductances
- Dynamic cross inductances
- Static inductances
- Emag. Torque
- Joule & iron losses
- Mechanical losses
- Total losses
- Magnet flux
- Winding resistance
- End winding inductance

1. TEST SELECTION

Select the test to be modeled

2. TEST CONFIGURATION

Define the default values of the test inputs

3. EXPORT INFORMATION

Finalize the export process

LUT

1. TEST SELECTION

2. TEST CONFIGURATION

3. EXPORT INFORMATION

INPUTS

Destination dir nameLUT

Export formatMAT - PSIM - Activate

Destination folderC:\Users

✓↺

Motor Factory – EXPORT AREA – SYSTEM – LUT / Export information	
1	Tab to be expanded to define the export information
2	Area in which the export information of parameters to be defined are listed
3	Button to validate the previous choices
4	Button to finalize the export of the data files. One click opens the folder where the directory is located

9.4 FMU format files

9.4.1 Compatibility

Two packages of FMU format files are automatically provided, one dedicated to Activate® and another one compatible with other system simulation tools.

Hence, the user will be able to select the required system simulation tool without any problem of compatibility. One of the main differences between the two files is how the units are managed in the name labels (See below illustrations).

The diagram illustrates the export process for FMU files dedicated to Activate. It shows the Altair FluxMotor logo and a functional mock-up interface with inputs $J_d(A)$ and $StLd(H)$. Below the interface, a list of files is shown: FMDData, FMU_ACTIVATE, and FMU_GENERIC. An arrow points from this list to the FMU Information dialog box.

FMU Information

Attribute	Value
fmVersion	2.0
modelName	FMUData_DSStatInductance
description	Altair Engineering FMUData_DSStatInductance
generationTool	Altair Engineering - All right reserved - Versio...
generationDateAndTime	2021-09-03T11:51:01Z
numberOfEventIndicators	0
variableNamingConvention	structured
Model Exchange	
modelIdentifier	FMUData_DSStatInductance

Variables

Name	Index	Variable	Description
Jd(A)	1	name	Jd(A)
Jq(A)	2	valueReference	1
StLd(H)	3	causality	input
interp01	4	variability	continuous
Current_definition_mode	5	datatype	Real
Max_line_current_mms_A	6	declaredType	Modelica Electrical Analog Interfaces Pin
Max_current_dens_mms_A/mm2	7		
No_comp_for_id_A	8		
Maximum_speed_rpm	9		
No_comp_for_speed	10		
Thermal_joining	11		
Winding_straight_part_temperature_C	12		
CS_end_winding_temperature_C	13		
OCS_end_winding_temperature_C	14		
Max_line_current_mms_A	15		
Max_current_dens_mms_A/mm2	16		

Exported FMU format files dedicated to Activate®

The diagram illustrates the export process for FMU files (Generic) compatible with other system simulation tools. It shows the Altair FluxMotor logo and a functional mock-up interface with inputs $J_d(A)$ and $StLd(H)$. Below the interface, a list of files is shown: FMDData, FMU_ACTIVATE, and FMU_GENERIC. An arrow points from this list to the FMU Information dialog box.

FMU Information

Attribute	Value
fmVersion	2.0
modelName	FMUData_DSStatInductance
description	Altair Engineering FMUData_DSStatInductance
generationTool	Altair Engineering - All right reserved - Versio...
generationDateAndTime	2021-09-03T11:50:56Z
numberOfEventIndicators	0
variableNamingConvention	structured
Model Exchange	
modelIdentifier	FMUData_DSStatInductance

Variables

Name	Index	Variable	Description
Jd_A	1	name	Jd_A
Jq_A	2	valueReference	1
StLd_H	3	causality	input
interp01	4	variability	continuous
Current_definition_mode	5	datatype	Real
Max_line_current_mms_A	6	declaredType	Modelica Electrical Analog Interfaces Pin
Max_current_dens_mms_A_per_mm2	7		
No_comp_for_id_A	8		
Maximum_speed_rpm	9		
No_comp_for_speed	10		
Thermal_joining	11		
Winding_straight_part_temperature_d	12		
CS_end_winding_temperature_deg_C	13		
OCS_end_winding_temperature_deg_C	14		
Magnet_temperature_Tmag_deg_C	15		
Rotor_initial_position_deg	16		

Exported FMU format files (Generic) compatible with other system simulation tools

9.4.2 A C/C++ compiler is needed

9.4.2.1 C/C++ compiler / System requirements

FluxMotor® requires a C/C++ compiler to perform some operation for creating FMU blocks.

Here is the list of the Visual Studio compilers supported:

Microsoft® Visual Studio 2019, Community, Professional, Enterprise

Microsoft® Visual Studio 2017, Community, Professional, Enterprise

Microsoft® Visual Studio 2019/2017/2015: Build Tools

Note: the option for **Windows 10 SDK** must be selected

Microsoft® Visual Studio C++ 2015 (VC 14.0 Express, Community and Professional)


Important Remark

The table above proposes different versions of Microsoft Visual Studio. Make sure the version you install is approved by your IT department and you have the right license (e.g. if you decide to use Professional Edition, a license is required)

9.4.2.2 Access path of the C/C++ Compiler

Once the C/C++ Compiler is installed on the computer, its access path must be specified in the user's preferences.

Note: When opening FluxMotor®, if a C/C++ Compiler is already installed on the computer, the corresponding install path is automatically written in the user's preferences.

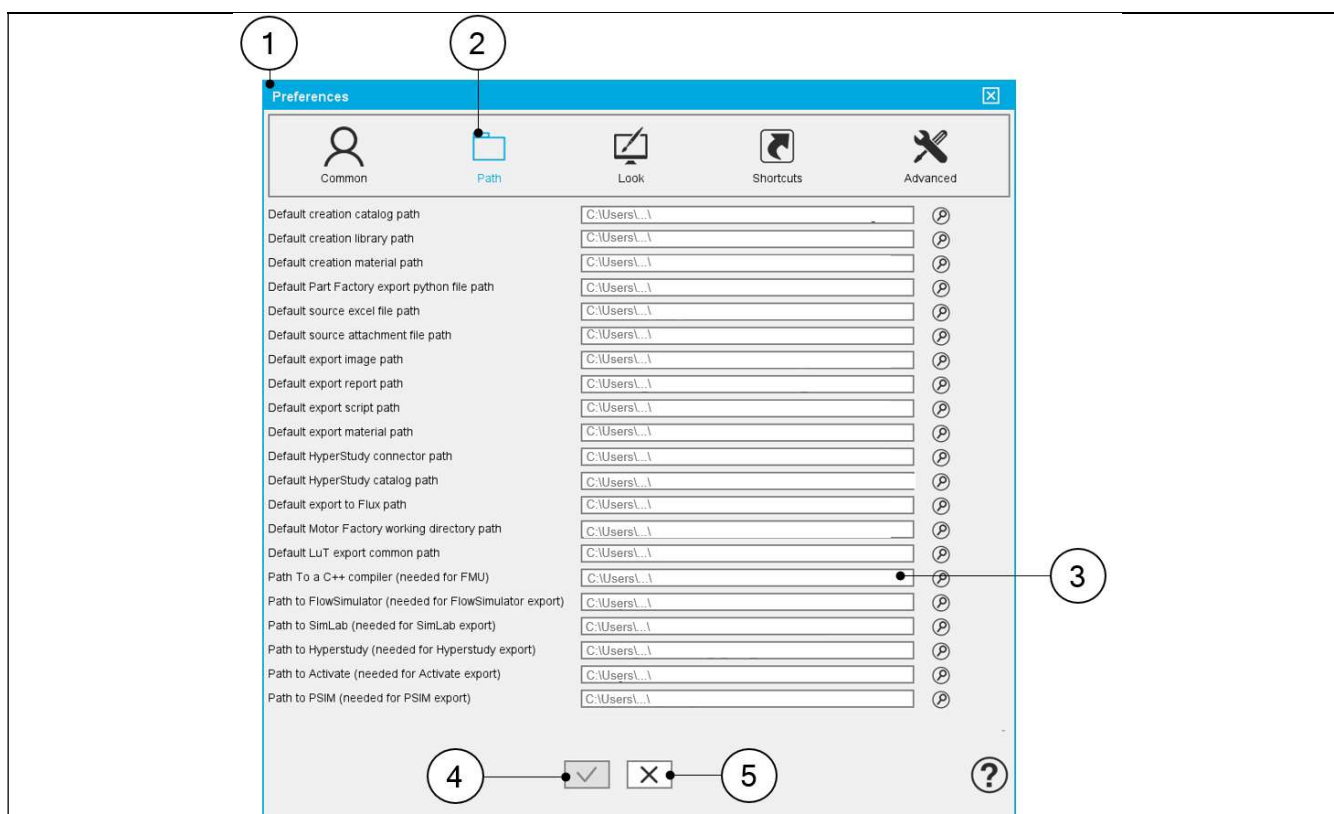

FluxMotor® / Supervisor / User's preferences / Location of the C/C++ Compiler

1	The Preferences dialog box is opened from the FluxMotor® supervisor.
2	Second tab is Path Preferences.
3	Define the location of the C/C++ Compiler on the computer

Here below is a list of files to select in the installation directory (path) according to the Visual Studio version installed:

Visual Studio 2019, Community	C:\Program Files (x86)\Microsoft Visual Studio\2019\Community\VC\Auxiliary\Build\vcvarsall.bat
Visual Studio 2019, Professional	C:\Program Files (x86)\Microsoft Visual Studio\2019\Professional\VC\Auxiliary\Build\vcvarsall.bat
Visual Studio 2019, Enterprise	C:\Program Files (x86)\Microsoft Visual Studio\2019\Enterprise\VC\Auxiliary\Build\vcvarsall.bat
Visual Studio 2017, Community	C:\Program Files (x86)\Microsoft Visual Studio\2017\Community\VC\Auxiliary\Build\vcvarsall.bat
Visual Studio 2017, Professional	C:\Program Files (x86)\Microsoft Visual Studio\2017\Professional\VC\Auxiliary\Build\vcvarsall.bat
Visual Studio 2017, Enterprise	C:\Program Files (x86)\Microsoft Visual Studio\2017\Enterprise\VC\Auxiliary\Build\vcvarsall.bat
Microsoft® Visual Studio C++ 2015 Express	C:\Program Files (x86)\Microsoft Visual Studio\14.0\VC\Build\vcvarsall.bat
Microsoft® Visual Studio C++ 2015 Community	C:\Program Files (x86)\Microsoft Visual Studio\14.0\VC\Build\vcvarsall.bat
Microsoft® Visual Studio C++ 2015 Professional	C:\Program Files (x86)\Microsoft Visual Studio\14.0\VC\Build\vcvarsall.bat
Microsoft® Visual Studio 2019, Build Tools	C:\Program Files (x86)\Microsoft Visual Studio\2019\BuildTools\VC\Auxiliary\Build\vcvarsall.bat
Microsoft® Visual Studio 2017, Build Tools	C:\Program Files (x86)\Microsoft Visual Studio\2017\BuildTools\VC\Auxiliary\Build\vcvarsall.bat

Note that the executable command is detected if the Visual Studio is already installed before or if the preference is set to an empty value and then reopening the preference.

9.4.3 Import FMU data in Altair® Activate®


Once FMU files are generated by FluxMotor®, these can be imported in environments like Activate®. This section explains how FMU files generated from FluxMotor® are used in Activate®. The FMU file of the D-axis flux is taken as an example.

First, Activate® is opened.

Either start creating a new project via a new modeling window or open an existing scm file.

To use FMU files from FluxMotor®, locate the FMU block in the palettes of the System library.

1) Select View > Palette Browser

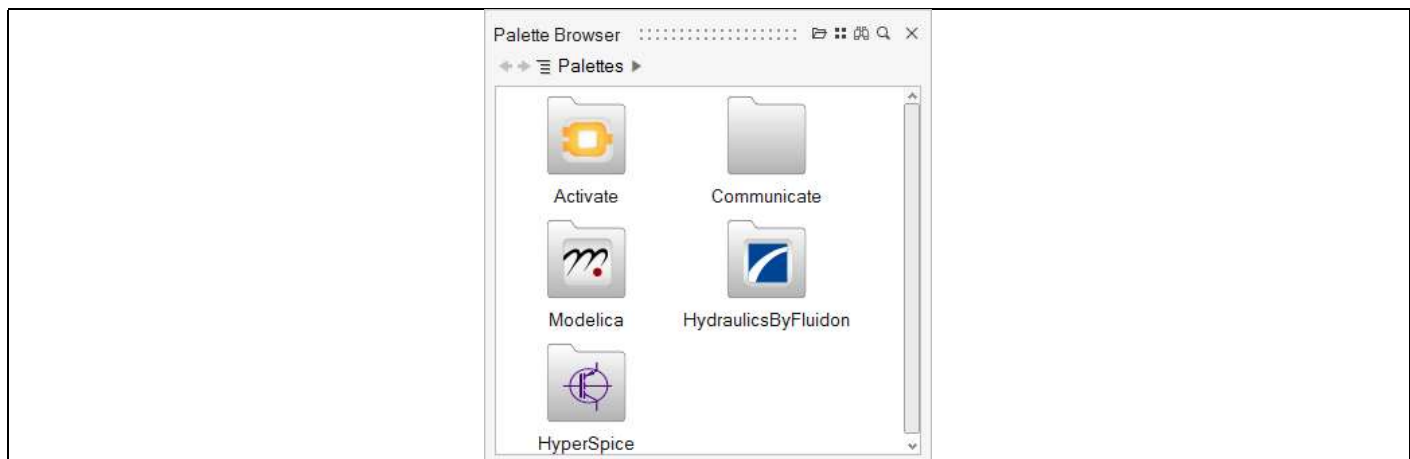

The Palette Browser displays the installed library palettes.


2) Double-click Activate® > CoSimulation.

The Palette Browser displays the blocks available in the CoSimulation palette.

3) Select the FMU block, then drag and drop it into the modeling window.

One can also write down “FMU” in the quick search field.

- 4) Double-click on the FMU dragged in the modeling window, or right-click, and from the context menu, select Parameters.

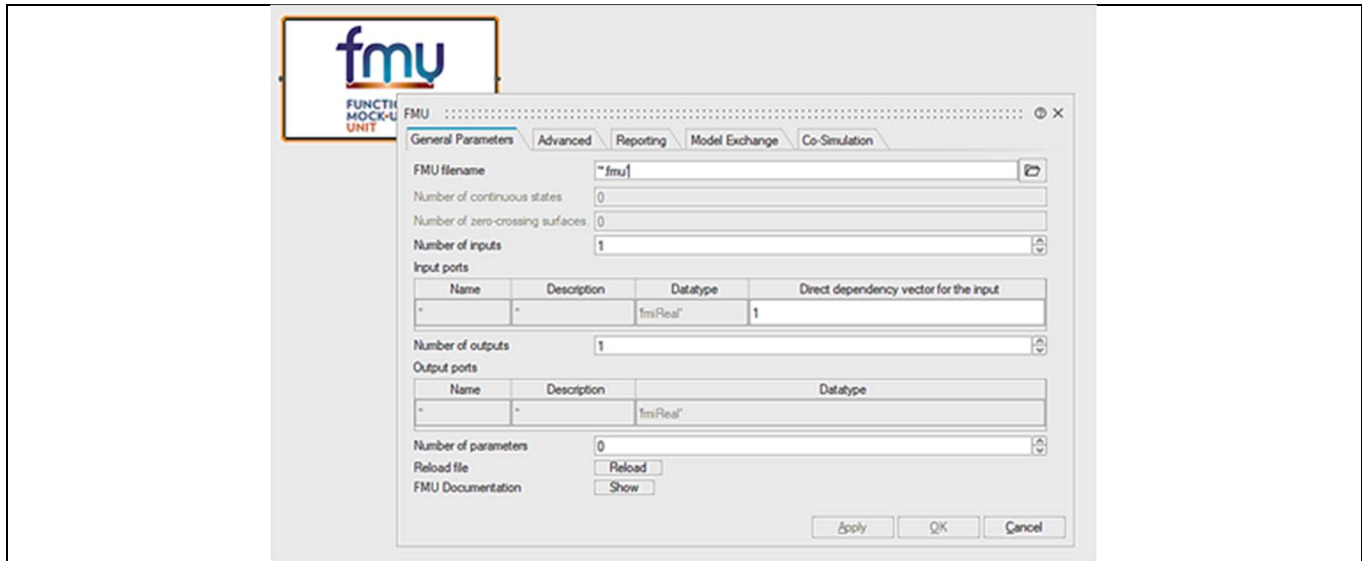


9.5 MAT format files

9.5.1 Introduction


Once MAT files are generated by FluxMotor®, they can be imported in environments like PSIM® Activate® or Compose®. This section explains the folder structure and the files generated by the export format “MAT – PSIM – Activate”.

The export generates a folder named according to the user choice. Inside it, two different folders can be found:

- A folder “FMDData”, containing several “.txt” files. Each file stocks the information about one exported variable (e.g., fluxes or inductances):

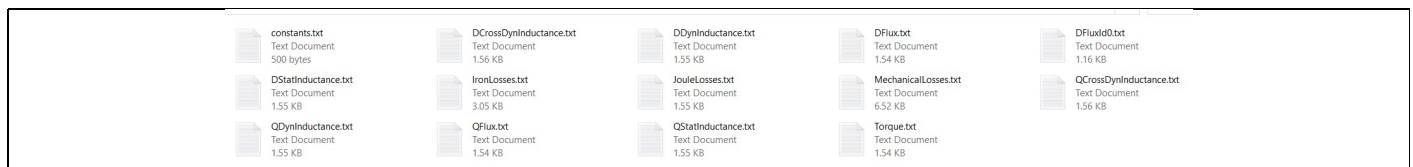

These files have the same format as the results exported from the FluxMotor test Characterization / Model. An example of the file containing the Joule losses is shown below.

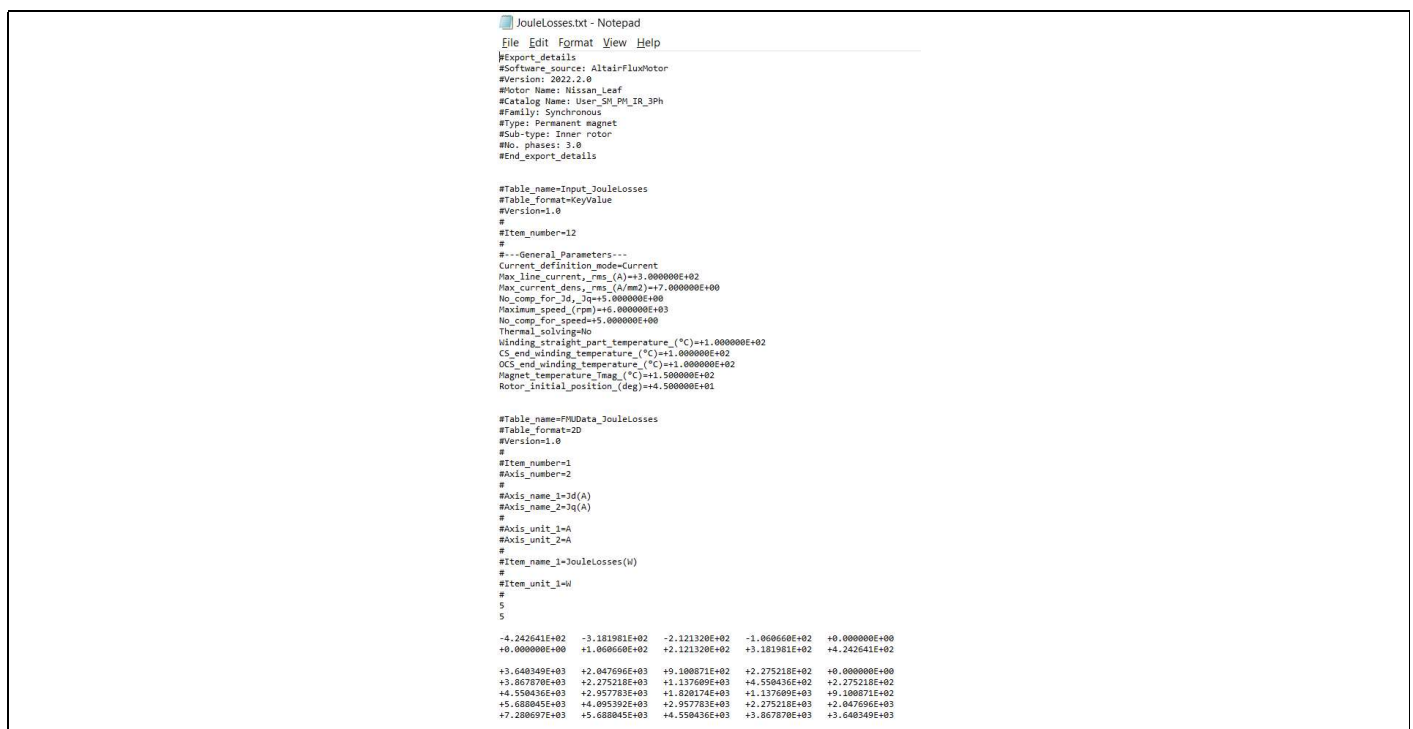

- A folder `MAT_PSIM` stocking the MAT file. It is written in version 5.0 and can be read by any software supporting this format. Here, the variables contained by this file are read by Compose®.

Command History		Variable Browser		Session Information	
Name	Value	Type	Scope		
ANGPOS_ROTOR_DEG	45	number	Base		
AXIS_MAGNET_TEMP	150	number	Base		
Catalog_Name	User_SM_PM_IR_3Ph	string	Base		
FLUX_D	<matrix(1x25)>	matrix	Base		
FLUX_ID0	[0.0671220325 0.0676971718 0.0632808409 ...]	matrix	Base		
FLUX_Q	<matrix(1x25)>	matrix	Base		
Family	Synchronous	string	Base		
ID_PEAK	[-424.264068711929 -318.198051533946 -21...	matrix	Base		
IQ_PEAK	[0 106.066017177982 212 132034355964 318...	matrix	Base		
J_inertia	0.0299335738386677	number	Base		
LD_DYN_vs_ID	<matrix(1x25)>	matrix	Base		
LD_DYN_vs_IQ	<matrix(1x25)>	matrix	Base		
LD_STAT_vs_ID	<matrix(1x25)>	matrix	Base		
LD_STAT_vs_IQ	<matrix(1x25)>	matrix	Base		
LOSS_IRON	<matrix(1x125)>	matrix	Base		
LOSS_JOULE	<matrix(1x25)>	matrix	Base		
LOSS_MECHANICAL	<matrix(1x200)>	matrix	Base		
LQ_DYN_vs_ID	<matrix(1x25)>	matrix	Base		
LQ_DYN_vs_IQ	<matrix(1x25)>	matrix	Base		
LQ_STAT_vs_ID	<matrix(1x25)>	matrix	Base		
LQ_STAT_vs_IQ	<matrix(1x25)>	matrix	Base		
L_end_winding	1.11642517844301e-05	number	Base		
Motor_Name	Nissan_Leaf	string	Base		
No_phases	3.0	string	Base		
Phi_M	0.0671220325	number	Base		
R_phase	0.0154984181044671	number	Base		
SPEED_RPM	[1200 2400 3600 4800 6000]	matrix	Base		
Software_source	AltairFluxMotor	string	Base		
Sub_type	Inner rotor	string	Base		
TEST_CURRENT_DEFINITION_MO...	CURRENT	string	Base		
TEST_CURRENT_DENSITY_RMS	7	number	Base		
TEST_CURRENT_LINE_RMS	300	number	Base		
TEST_MAXIMUM_SPEED	6000	number	Base		
TEST_NO_COMPTUTATIONS_FOR...	5	number	Base		
TEST_NO_COMPTUTATIONS_FOR...	5	number	Base		
THERMAL_MAGNET_SOLVING_MO...	MAGNET_CONSTANT_TEMPERATURE	string	Base		
TORQUE	<matrix(1x25)>	matrix	Base		
T_ACTIVE_LENGTH_WINDING_C	100	number	Base		
T_CS_END_WINDING_C	100	number	Base		
T_MAGNET_C	150	number	Base		
T_OCS_END_WINDING_C	100	number	Base		
Type	Permanent magnet	string	Base		
Version	2022.2.0	string	Base		
initial_angle_rotor_deg	45	number	Base		
num_pole_pairs	4	number	Base		